Prolight PLF701VS



3LCD USB

Brief Introduction Beta 2.5	A brief introduction to the PLF701VS: The Prolight LCD projector offers 1700 Ansi lumens, a contrast of 450:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a 359 cm image width well. However, if room light is available, the image width should ideally not exceed 239 cm. It is no longer offered by the manufacturer Prolight.
Display Type	3 x 0,7" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1700
Projector: Contrast	450:1 full on/off
Projector: Black Level	3,7778 min. Lumen
Projector: Offset	-
Screen	567 Lux (bei 200 cm Screen) 450:1 full on/off 1,268 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	165W EHPL Lamp Articel Nr.: LMPf18719
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	1,8-2,3:1
Audio	1 x 2W
Connections	D-sub 15pin in und out Cinch Video in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	230W
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
Operating Noise	37dB
Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	53 fL / max. 359 cm screen width

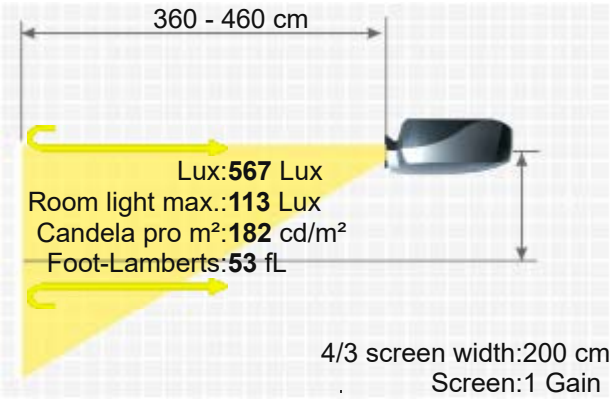

PROLIGHT PLF701VS

	182 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

https://www.projector-database.com/pro/prolightPLF701VS-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.