
Prolight PLF702AX



Brief Introduction Beta 2.5	The Prolight model PLF702AX is an LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. The projector will be able to illuminate a picture width of 369 cm well. However, if room light is available, the image width should ideally not exceed 246 cm. This model is no longer available from Prolight.
Display Type	3 x 0,7" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1800
Projector: Contrast	450:1 full on/off
Projector: Black Level	4,0000 min. Lumen
Projector: Offset	-
Screen	600 Lux (bei 200 cm Screen) 450:1 full on/off 1,342 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	165W EHPL Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	1,8-2,3:1
Audio	1 x 2W
Connections	D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	230W
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
Operating Noise	37dB
Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	56 fL / max. 369 cm screen width 192 cd/m²

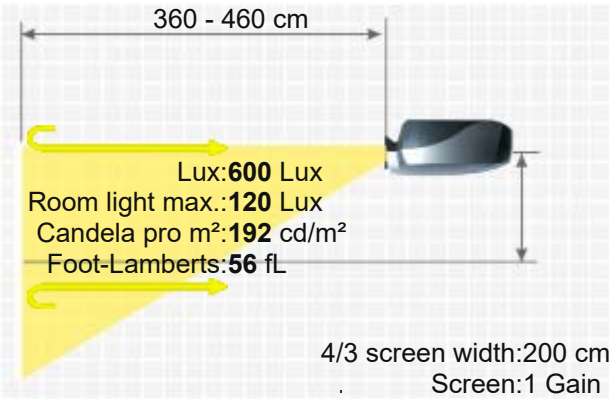

PROLIGHT PLF702AX

Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/prolightPLF702AX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.