Prolight PLF702VS



Brief Introduction Beta 2.5	The Prolight model PLF702VS is an LCD projector with SVGA 800 x 600 resolution and a contrast of 450:1. The projector can illuminate images up to 359 cm wide thanks to its 1700 Ansi lumens. In room light, however, the image width should ideally be less than 239 cm. It is no longer available from the manufacturer Prolight.	
Display Type	3 x 0,7" LCD TFT Panel SVGA 4/3 Liquid Crystal Display	
Projector		
Ansi-Lumen	1700	
Contrast	450:1 full on/off	
Black Level	3,7778 min. Lumen	
Offset	-	
Screen		
Ansi-Lumen	567 Lux (bei 200 cm Screen)	
Contrast	450:1 full on/off	
Black Level	1,268 min. Lumen	
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed	
Video Modes	PAL, SECAM, NTSC	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source	165W EHPL Lamp	
Light Life	2000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,23	
Objective	F=1,7-2,1 f=26-32 mm	
Throw Ratio	1,8-2,3:1	
Audio	1 x 2W	
Connections	D-sub 15pin in und out Cinch Video in S-Video in Mini Jack USB RS232C	
Ceiling Mounting	Yes	
Power	230W	
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³	
Operating Noise	37dB	
Weight	3,10 kg / 6,83 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz	
Foot-Lamberts	53 fL / max. 359 cm screen width 182 cd/m²	

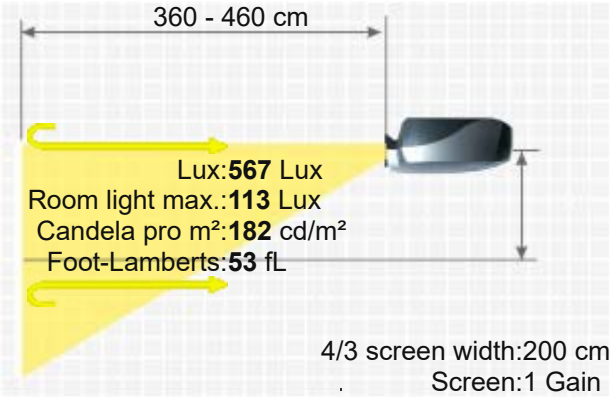

PROLIGHT PLF702VS

Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

https://www.projector-database.com/pro/prolightPLF702VS-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.