
Prolight PLF880BS



3LCD USB

Brief Introduction Beta 2.5	The standard portable PLF880BS LCD projector from Prolight has 2000 Ansi lumens, a contrast of 450:1 and an SVGA 800 x 600 resolution. Thanks to the brightness of 2000 Ansi lumens, an image width of 389 cm is possible. In room light, the image should be max. 259 cm wide. This model is no longer available from Prolight.	
Display Type	3 x 0,79" LCD TFT Panel SVGA 4/3 Liquid Crystal Display	
	Projector	Screen
Ansi-Lumen	2000	667 Lux (bei 200 cm Screen)
Contrast	450:1 full on/off	450:1 full on/off
Black Level	4,4444 min. Lumen	1,492 min. Lumen
Offset	-	
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed	
Video Modes	PAL, SECAM, NTSC	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.	
Light Source	180W Lamp	
Light Life	2000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,23	
Objective	F=1,7-2,1 f=26-32 mm	
Throw Ratio	1,6-2,0:1	
Audio	1 x 2W	
Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C	
Ceiling Mounting	Yes	
Power	250W	
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³	
Operating Noise	37dB	
Weight	3,10 kg / 6,83 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz	
Foot-Lamberts	62 fL / max. 389 cm screen width	

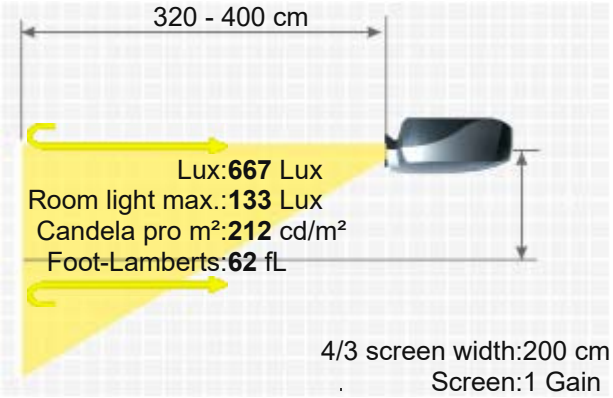

PROLIGHT PLF880BS

	212 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

https://www.projector-database.com/pro/prolightPLF880BS-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.