
Prolight PLF881BX



Brief Introduction Beta 2.5	The standard portable PLF881BX LCD projector from Prolight has 1800 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. An image width of up to 369 cm is possible as the projector has 1800 Ansi lumens. However, if room light is available, the picture should be max. 246 cm wide. It is no longer offered by the manufacturer Prolight.
Display Type	3 x 0,79" LCD TFT Panel XGA 4/3 Liquid Crystal Display

	Projector	Screen
Ansi-Lumen	1800	600 Lux (bei 200 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level	4,5000 min. Lumen	1,511 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	180W Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,23
Objective	F=1,7-2,1 f=26-32 mm
Throw Ratio	1,6-2,0:1
Audio	1 x 2W

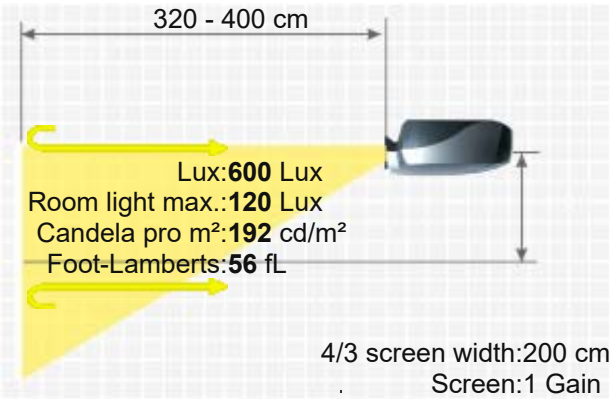

Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	250W
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
Operating Noise	37dB
Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	56 fL / max. 369 cm screen width

PROLIGHT PLF881BX

	192 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

https://www.projector-database.com/pro/prolightPLF881BX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.