

Prolight PLF882BX



Brief Introduction

Beta 2.5

The standard portable Prolight PLF882BX LCD projector has 2200 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. 2200 Ansi lumens ensure that a picture width of 408 cm is also possible. However, if room light is available, the picture should be max. 272 cm wide. It is no longer offered by the manufacturer Prolight.

 3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

2200

Contrast

450:1 full on/off

Black Level

4,8889 min. Lumen

Offset

-

Resolution

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

180W Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,23

Objective

F=1,7-2,1 f=26-32 mm

Throw Ratio

1,6-2,0:1

Audio

1 x 2W

Connections

DVI in
D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting

Yes

Power

250W

Size WxHxD

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

Operating Noise

37dB

Weight

3,10 kg / 6,83 lbs.

Keystone

-

Illumination

-


Frequenz

H-sync: 15-80 kHz
V-sync: 43-85 Hz

Foot-Lamberts

68 fL / max. 408 cm screen width

733 Lux (bei 200 cm Screen)
450:1 full on/off
1,64 min. Lumen

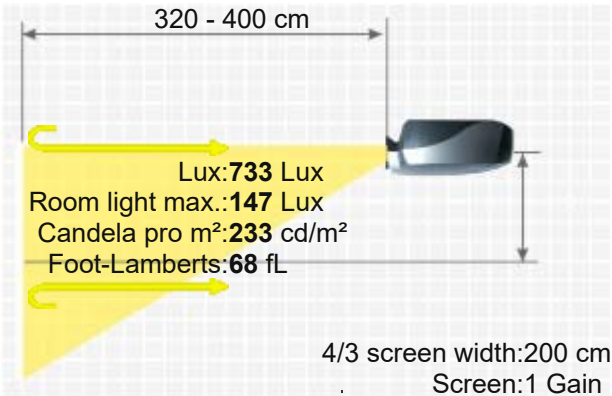

P R O L I G H T P L F 8 8 2 B X

233 cd/m²

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/prolightPLF882BX-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.