
Prolight PLF894BX



3LCD USB

Brief Introduction Beta 2.5	The Prolight model PLF894BX is an LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. An image width of up to 408 cm is possible, as the projector has 2200 Ansi lumens. However, if room light is available, the picture should be max. 272 cm wide. The model built in 2006 is no longer offered by Prolight.		
Display Type	3 x 0,79" LCD TFT Panel XGA 4/3 Liquid Crystal Display		
Ansi-Lumen	Projector: 2200	Screen: 733 Lux (bei 200 cm Screen)	
Contrast	Projector: 450:1 full on/off	Screen: 450:1 full on/off	
Black Level	Projector: 4,8889 min. Lumen	Screen: 1,64 min. Lumen	
Offset	-		
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed		
Video Modes	PAL, SECAM, NTSC		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.		
Light Source	195W Lamp		
Light Life	2000 h.		
Operating Costs	-		
Focus	Manual		
Zoom	Manual 1,23		
Objective	F=1,7-2,1 f=26-32 mm		
Throw Ratio	1,6-2,0:1		
Audio	1 x 2W		
Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C		
Ceiling Mounting	Yes		
Power	260W		
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³		
Operating Noise	37dB		
Weight	3,10 kg / 6,83 lbs.		
Keystone	-		
Illumination	-		
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz		
Foot-Lamberts	68 fL / max. 408 cm screen width		

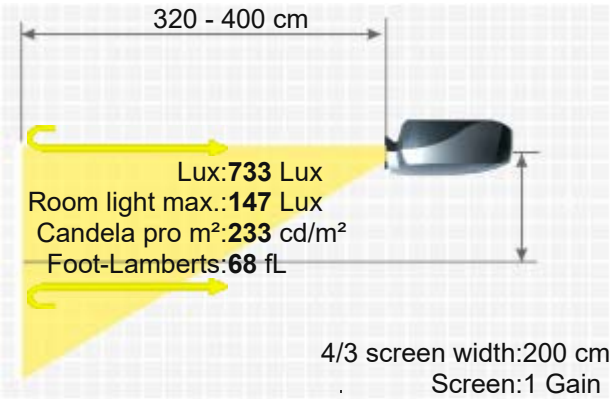

PROLIGHT PLF894BX

	233 cd/m²
Features	-
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

https://www.projector-database.com/pro/prolightPLF894BX-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.