

Prolight PLF993BX



Brief Introduction

Beta 2.5

The standard portable PLF993BX LCD has 2500 Ansi lumens, a contrast of 450:1 and an XGA 1024 x 768 resolution. 2500 Ansi lumens ensure that a picture width of 435 cm is also possible. However, if room light is available, the picture should be max. 290 cm wide. It is no longer offered by the manufacturer Prolight.

3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

2500

Contrast

450:1 full on/off

Black Level

5,5556 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

195W Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,23

Objective

F=1,7-2,1 f=26-32 mm

Throw Ratio

1,6-2,0:1

Audio

1 x 2W

Connections

DVI in
D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack
USB
RS232C

Ceiling Mounting

Yes

Power

260W

Size WxHxD

233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³

Operating Noise

37dB

Weight

3,10 kg / 6,83 lbs.

Keystone

-

Illumination

-


Frequenz

H-sync: 15-80 kHz

V-sync: 43-85 Hz

Foot-Lamberts

77 fL / max. 435 cm screen width

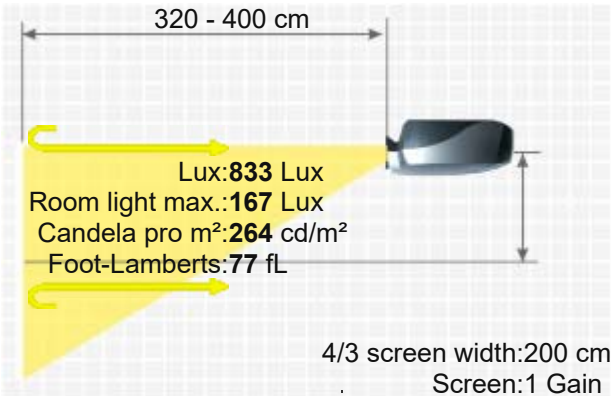

P R O L I G H T P L F 9 9 3 B X

264 cd/m²

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/prolightPLF993BX-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.