Provox HPV300



Brief Introduction Beta 2.5	A brief introduction to the Provox HPV300. The projector has a WPAL 1024 x 576 resolution and a contrast of 2500:1. 1850 Ansi lumens ensure that a picture width of 437 cm is also possible. However, if room light is available, the picture should be max. 291 cm wide. This model is no longer offered by Provox.
Display Type	[redacted] -
Ansi-Lumen	Projector: 1850 / Screen: 822 Lux (bei 200 cm Screen)
Contrast	Projector: 2500:1 full on/off / Screen: 2500:1 full on/off
Black Level	Projector: 0,7400 min. Lumen / Screen: 0,329 min. Lumen
Offset	-
Resolution	WPAL 1024 x 576 489.824 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	-
Light Life	2000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	-
Zoom	-
Objective	-
Throw Ratio	-
Audio	-
Connections	D-sub 15 pin in und out S-Video in Cinch Video in
Ceiling Mounting	Yes
Power	-
Size WxHxD	333 x 123 x 295 mm (13,1"x4,8"x11,6") 12,08 L/dm³
Operating Noise	-
Weight	-
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	76 fL / max. 437 cm screen width 260 cd/m²
Features	Eco Mode
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

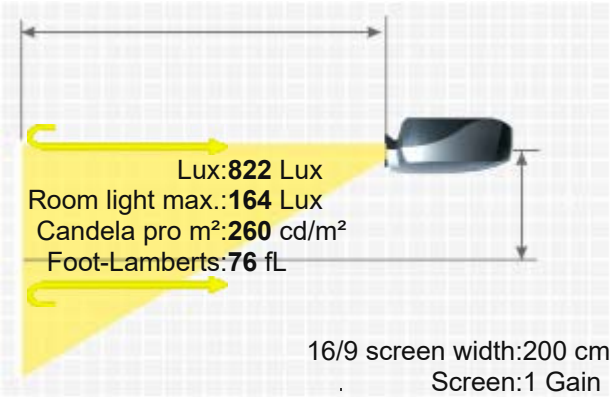

More Details

HCinema

https://www.projector-database.com/pro/provoxhpv300-en.html

PROVOX HPV300

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.