Provox HPV320



Brief Introduction Beta 2.5	The Provox HPV320 standard portable projector has 2000 Ansi lumens, a contrast of 2500:1 and a WPAL 1024 x 576 resolution. 2000 Ansi lumens ensure that a picture width of 454 cm is also possible. However, if room light is available, the picture should be max. 303 cm wide. It is no longer offered by the manufacturer Provox.	
Display Type	[redacted] -	
Ansi-Lumen	Projector: 2000	Screen: 889 Lux (bei 200 cm Screen)
Contrast	Projector: 2500:1 full on/off	Screen: 2500:1 full on/off
Black Level	Projector: 0,8000 min. Lumen	Screen: 0,356 min. Lumen
Offset	-	
Resolution	WPAL 1024 x 576 489.824 Pixel	
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p	
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.	
Light Source	-	
Light Life	2000 h. 4000 h. in Eco Mode	
Operating Costs	-	
Focus	Manual	
Zoom	Manual	
Objective	-	
Throw Ratio	-	
Audio	-	
Connections	DVI-I S-Video in Cinch Video in	
Ceiling Mounting	Yes	
Power	-	
Size WxHxD	333 x 123 x 295 mm (13,1"x4,8"x11,6") 12,08 L/dm³	
Operating Noise	32,7 / 30 dB in Eco Mode	

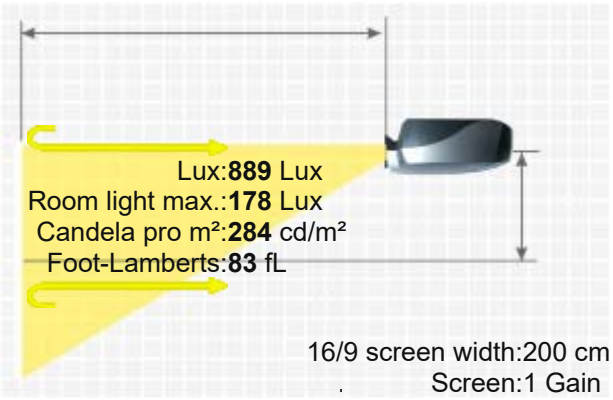

Weight	3,60 kg / 7,94 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-82 kHz V-sync: 50-85 Hz
Foot-Lamberts	83 fL / max. 454 cm screen width 284 cd/m²
Features	Eco Mode
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/provoxhpv320-en.html

PROVOX HPV320

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.