
Impression A2

feather light and feature rich

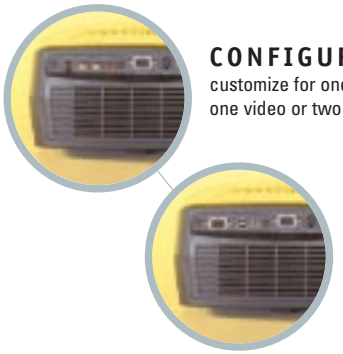

CONFIGURABLE
customize for one computer and one video or two computer inputs

IMPRESSIVE QUALITY
650 ANSI lumens, 300:1 contrast ratio, and excellent XGA compression

MOST PORTABLE
just 7.7 pounds makes it a cinch to take anywhere



DIGITAL ZOOM
includes 16X digital zoom in addition to 1.3:1 optical zoom

LONG LAMP LIFE
2,500-hour lamp means low maintentance costs, fewer worries

actual size: 4.4 in. H x 8.8 in. W x 12.3 in. L

WHISPER QUIET
just 38 db offers remarkably quiet operation

Trust your presentations to the Impression A2.

Your most important presentations deserve a projector that provides outstanding image quality and goes wherever you go. The Proxima Impression A2 offers the brightness, image quality, and ease of use you need in an extremely portable package. A mere 7.7 pounds, the Impression A2 offers the widest source compatibility of any projector in its class, so you won't have to upgrade every time you get a new laptop, DVD drive, or the next great multimedia device. Pick up an Impression A2, and get everything your presentations deserve.

- one of the world's lightest projectors at just 7.7 pounds
- 650 ANSI lumens brightness for lights-on presentations
- true SVGA (800 x 600) resolution supports any notebook or desktop computer
- wide bandwidth makes it the most compatible projector in its class
- configurable inputs let you customize the projector to fit your needs
- digital zoom provides up to 16X magnification of image details
- a new generation of Fit-to-View® resizing technology means that in most resolutions even the smallest text looks clean and crisp
- BatMouse II remote gives you control without additional software

PROXIMA®
MULTIMEDIA PROJECTORS



Impression A2

A2 Set Up



Set up the A2 anywhere in the room. Adjust the zoom and focus for vivid, large images even in well-lit rooms.

Configure the inputs to accommodate one computer and one video source (such as a VCR, DVD player, laserdisc player, video camera) or two computers simultaneously.

A2 Projection Distances/Image Sizes

		Image Size (Diagonal)			
Projection Distance		Minimum		Maximum	
3.3′	1.0 m	1.6′	0.5 m	2.1′	0.6 m
10.0′	3.0 m	4.8′	1.5 m	6.3′	1.9 m
20.0′	6.1 m	9.6′	2.9 m	12.6′	3.8 m
30.0′	9.1 m	14.4′	4.4 m	18.9′	5.8 m
40.0′	12.2 m	19.2′	5.9 m	25.2′	7.7 m
50.0′	15.2 m	24.0′	7.3 m	31.5′	9.6 m

PROXIMA®
MULTIMEDIA PROJECTORS

Main Office: 9440 Carroll Park Drive, San Diego, CA 92121-2298, (619) 457-5500, FAX (619) 457-9647, (800) 447-7692 (U.S. and Canada)

Latin American Office: 3191 Coral Way, Suite 636, Miami, FL, 33145-3213, (305) 445-6445, FAX (305) 445-6435

European Office: K.G. Meldahlsvei 9, Postboks 1403, N-1602 Fredrikstad, Norway, +47 69 34 01 55, FAX +47 69 34 06 32

www.proxima.com

www.presentersuniversity.com

Proxima and Fit-to-View® are registered trademarks of Proxima Corporation. Other trademarks are the property of their respective owners. ©1998 Proxima Corporation. All rights reserved. Specifications are subject to change without notice.

11/98 709-00680-1

WHAT'S INCLUDED

Model A2 includes:

- BatMouse II remote control (w/batteries)
- Product documentation
- 7 ft. coaxial computer cable with 7 ft. mouse cable attached
- 7 ft. video cable, power cord
- Serial mouse adapter (PC), PS/2 mouse adapter
- Soft carrying case, lens cap

ORDERING INFORMATION

Model Number: A2 — **For worldwide use**

Optional Accessories

CMOD-001	Computer interface board (2nd computer USB mouse w/audio)
CASE-102	Compact carry-on rolling hard case (checkable/shippable)
CASE-103	Deluxe carry-on rolling hard case (checkable/shippable) with extra storage capacity
A640	40" portable tabletop screen
A650	50" portable tabletop screen

TECHNICAL SPECIFICATIONS

Computer Compatibility	▪ IBM PC, PS/2, Pentium and Compatibles ▪ Apple Macintosh, Power Mac, and PowerBook
Video Compatibility	▪ NTSC, PAL, SECAM
Input Sources	▪ 1 computer, 1 composite video, 1 S-video, 2 audio
Interface Board	▪ 1 S-video, 1 composite video, 1 L/R sound (standard configuration) ▪ 1 computer, 1 USB mouse, 1 audio input (optional)
Bandwidth	▪ 12-150 MHz
H-Sync Range	▪ 15 to 100 KHz
V-Sync Range	▪ 43.5 to 130 Hz
Aspect Ratio	▪ 4:3 (16:9 video)
Throw Ratio	▪ Wide: 1.3:1, tele: 1.7:1
Brightness	▪ 650 ANSI lumens (typical)
Contrast Ratio	▪ 300:1
Display Technology	▪ 0.9 in. polysilicon TFT LCD x 3
Resolutions Supported	▪ VGA (640 x 480) Fit-to-View®, SVGA (800 x 600) native XGA (1024 x 768) Fit-to-View® Power Mac (1152 x 870) Fit-to-View®
Keystone Correction	▪ 12°
Number of Colors	▪ 16.7 million
Image Size (Diagonal)	▪ 1.6 ft to 31.5 ft (0.5 m to 9.6 m)
Lens	▪ Manual zoom and focus 1.3:1 ratio ▪ Focal length: 45mm to 59mm, f/2.5 to f/2.9
Projection Distance (From Screen)	▪ 3.3 ft to 50 ft (1.0 m to 15.2 m)
Lamp (Life)	▪ 120 watt UHP ▪ Lamp life: 2,500 hours
Audio	▪ 2 x 1-watt stereo speakers
Remote Control	▪ BatMouse II remote with trackball and left/right/drag mouse button emulation (no software required)
Approvals	▪ FCC Class A (U.S.); UL, C-UL (Canada); CE (Europe)
Power Consumption	▪ 220 watts
Power Requirements	▪ 100-120V / 220-240 VAC
Operating Temperature (Sea Level)	▪ 59-86° F (15-30° C)
Weight	▪ 7.7 lb (3.5 kg)
Dimensions (H x W x L)	▪ 4.4 in. x 8.8 in. x 12.3 in. 11.2 cm x 22.4 cm x 31.2 cm
Projection Method	▪ front/rear, desktop/ceiling
On-Screen Menu Languages	▪ English, German, French, Italian, Spanish, Norwegian, Japanese, Chinese, Korean
Audible Noise	▪ 38 db
Warranty	▪ Two years on parts and labor (excluding lamp)

