Proxima PRO AV 9550



3LCD | Lens Shift | Motor | Pointer | W.-Optiken | CRESTRON Steuerung

Brief Introduction Beta 2.5	The Proxima PRO AV 9550 LCD projector has 5800 Ansi lumens, a contrast of 600:1 and an SXGA 1280 x 1024 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 645 cm is possible, if the image width is smaller (we recommend max. 430 cm), rooms with residual light are also no problem. The model is no longer offered by Proxima, but is still very popular in our projector database.
Display Type	3 x 1,8" LCD TFT Panel mit MLA SXGA 5/4 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 5800 / 2900 im singel lamp Mode — Screen: 1759 Lux (bei 203 cm Screen)
Contrast	Projector: 600:1 full on/off — Screen: 600:1 full on/off
Black Level	Projector: 9,6667 min. Lumen — Screen: 2.948 min. Lumen
Lens shift	Vert.: +/-50%
Resolution	SXGA 1280 x 1024 1.310.720 Pixel
Video Modes	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	2 x 200W UHP Lamp Articel Nr.: SP-LAMP-004
Light Life	1000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,29
Objective	F=2,0-2,3 f=75,7-97,5 mm
Throw Ratio	2,12-2,73:1
Audio	2 x 3W
Connections	• Input 1 (Modular): DVI-I, Audio in, Maus controlInput 2 (Modular): 5xBNC (RGBHV, RGBS, RGB,YPbPr, YCbCr), Audio in, Maus control;Input 3 (Modular): 2xBNC (Composite, Y, C video),S-video,Audio in
Ceiling Mounting	Yes
Power	900W
Size WxHxD	439 x 227 x 604 mm (17,3"x8,9"x23,8") 60,19 L/dm³
Operating Noise	45dB
Weight	20,50 kg / 45,19 lbs.
Keystone	Vert.: +/-30°
Illumination	85%
Frequenz	H-sync: 15-120 kHz V-sync: 50-120 Hz Range max.: 230 MHz
Foot-Lamberts	163 fL / max. 645 cm screen width 558 cd/m²

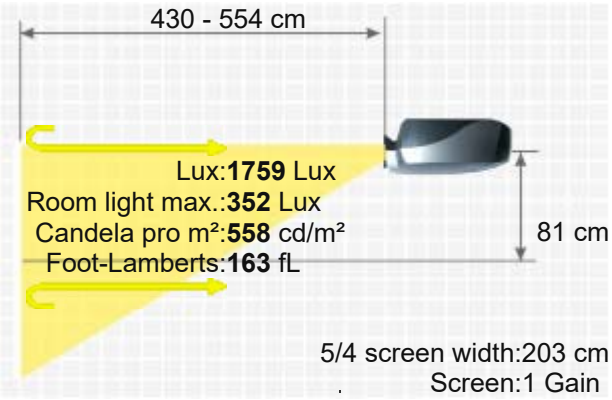



PROXIMA PRO AV 9550

Features

- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Gamma correction
- Remote control with laser pointer und mouse control
- Crestron®-Software compatible.
- digital zoom
- Faroudja De-interlacer

Optional

Bulb only Philips	NLMP3164
Single lamp ruby	Ruby-LMP3164
Single lamp original	SP-LAMP-004
Universal Remote original	Fernb-uni-V3
Remote control original	645 047 7867 / CXJT
Air filter A bottom original	910 292 3163
Air filter C left original	910 292 3187

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n16060

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Proxima LENS-018	2.6-3.5:1	5.3-7.1 m	+/-50%		Powered
Proxima LENS-011	4.6-6:1	9.3-12.2 m	+/-40%		Powered
Proxima LENS-005	2.07-2.67:1	4.2-5.4 m	+/-50%		Powered
Proxima LENS-004	3.4-4.5:1	6.9-9.1 m	+/-40%		Powered
Proxima LENS-003	1.8-2.9:1	3.7-5.9 m	+/-50%		Powered
Fix Optional Lenses					
Proxima LENS-019	0.8:1	1.6 m	+/-0.0%		No Zoom
Proxima LENS-002	6.9:1	14 m	+/-40%		No Zoom
Proxima LENS-001	1.2:1	2.4 m	+/-40%		No Zoom

Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details https://www.projector-database.com/pro/proximaproav9550-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.