

Sanyo PLC XU86

SANYO PLC XU86



Brief Introduction

Beta 2.5

Display Type



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2500

833 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

5,0000 min. Lumen

1,676 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHP Lamp

Articel Nr.: 610 323 0726

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,57

Objective

F=1,6-2,5 f=17,7-28,3 mm

Throw Ratio

1,23-1,93:1

Audio

1W Mono

Connections

DVI-I mit HDCP

D-sub 15pin in

Cinch Video in

Cinch Stereo in


S-Video in

Mini Jack

RJ45

USB Typ B

RS232C Din 8pin

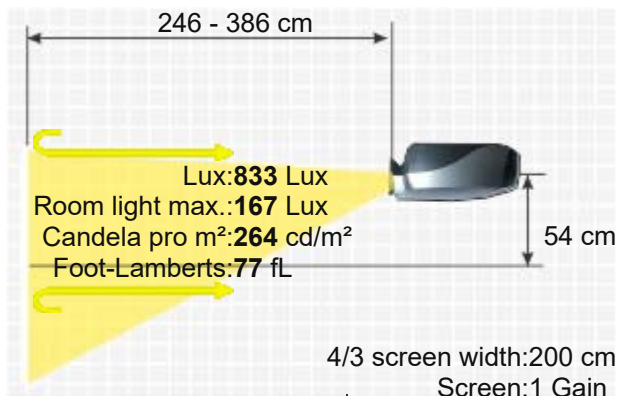

Ceiling Mounting Yes
Power 280 / 210W in Eco Mode
Size WxHxD 294,5 x 69,5 x 208 mm (11,6"x2,7"x8,2") 4,22 L/dm³
Operating Noise 34 / 29 dB in Eco Mode

Weight 2,60 kg / 5,73 lbs.
Keystone Vert.: +/-20°
Illumination 85%
H-sync: 15-100 kHz
Frequenz V-sync: 50-100 Hz
Range max.: 140 MHz
Foot-Lamberts 77 fL / max. 435 cm screen width
264 cd/m²

- Direkt Power Off
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Gamma correction
- Password protection
- Remote control with laser pointer und mouse control
- PJLink™
- Control via web browser
- Wi-Fi network compatible.
- Lan network compatible.
-

Bulb only NLMP16688
Lamp ruby Ruby-LMP16688
Lamp original 610 323 0726 / 610 332 3855 / LMP90 / LMP106 / ET-SLMP106
Optional
Universal Remote original Fernb-uni-V3
Remote control original 945 078 9060 / CXTF
Ceiling Mount 100-120 Halterung100

Status
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n4494>
2005 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



<https://www.projector-database.com/pro/sanyoplcxu86-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

