

SHARP X-P601Q



Beta 2.5



HDTV 16/9 Ti Digital Light Processing Chip

Diagram illustrating the setup for a projector screen. The screen width is 250 - 400 cm. The projector is positioned 62 cm above the screen. The light distribution is shown as a yellow cone, with the following values:

- Lux: **2667 Lux**
- Room light max.: **533 Lux**
- Candela pro m²: **850 cd/m²**
- Foot-Lamberts: **248 fL**

Additional specifications for the screen:

- 16/9 screen width: 200 cm
- Screen: 1 Gain

12V Trigger
Wired Remote



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
530W / 285W Eco
486 x 185,5 x 432,5 mm (19,1"x7,3"x17") 38,84 L/dm³
36 / 34 dB in Eco Mode

Weight
Keystone
Illumination

14,50 kg / 30,86 lbs.
-
-

Frequenz

H-sync: 15-140 kHz
V-sync: 24-120 Hz

Foot-Lamberts


248 fL / max. 787 cm screen width
850 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- 24/7 continuous operation capable
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- AMX
- InstaCare
- Portrait Mode

Features

Screen Mirroring

-

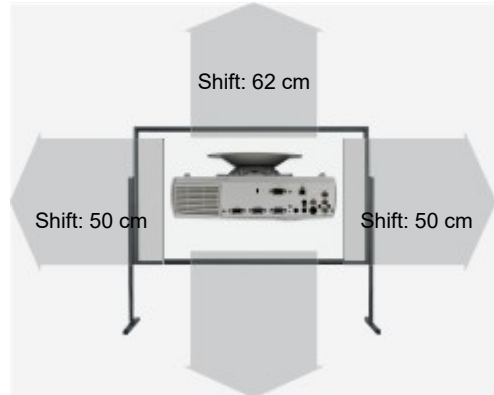

Optional accessories



Deckenhalterung Länge 225 mm

Halterung45

85,80 €

Status 2024 Current model // Last update of the data: 2025-10-27

Data



More Details



HCinema

<https://www.projector-database.com/pro/sharpxpp601q-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.