

SINDORicoh PJ X3350

SINDORICOH PJ X3350



Brief Introduction

Beta 2.5

The standard portable PJ X3350 LCD has 3350 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. An image width of up to 504 cm is possible. However, the image should be smaller in room light. We recommend max. 336 cm. This model is no longer offered by SINDORicoh.

Display Type



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 3350

Screen 1084 Lux (bei 203 cm Screen)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

4,1875 min. Lumen

1.36 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC (auch 4,43), MPAL, NPAL

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Life

250W UHB Lamp

Operating Costs

-

Focus

-

Zoom

-

Objective

-

Throw Ratio

-

Audio

2 x 1,2W

Connections

Cinch Stereo in

D-sub 15pin in und out

Cinch Video in

S-Video in

Ceiling Mounting

-

Power

-

Size WxHxD

289 x 119 x 345 mm (11,4"x4,7"x13,6") 11,86 L/dm³

Operating Noise

-

Weight

6,30 kg / 13,89 lbs.

Keystone

-

Illumination

-

Frequenz

H-sync: 25-80 kHz

V-sync: 56-120 Hz

Foot-Lamberts

101 fL / max. 504 cm screen width

346 cd/m²


Features

■ Picture-in-Picture

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

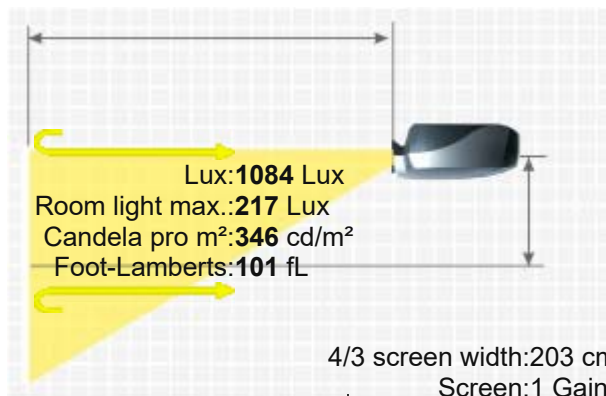

More Details



HCinema

<https://www.projector-database.com/pro/sindoricohpjx3350-en.html>

