

SINDORicoh SRP 2100XG



SINDORICOH SRP 2100XG



The SINDORicoh SRP 2100XG standard portable LCD projector has 2100 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. 2100 Ansi lumens ensure that a picture width of 399 cm is also possible. However, if room light is available, the picture should be max. 266 cm wide. This model is no longer offered by SINDORicoh.

 3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	2100	679 Lux (bei 203 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level Offset	5,2500 min. Lumen	1.711 min. Lumen

XGA 1024 x 768
786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC (auch 4,43), MPAL, NPAL

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W UHB Lamp

-

-

Manual

Manual 1,3

F=1,7-2,3

-

2 x 1,2W Stereo

Cinch Stereo in
YUV in
Cinch Video in
S-Video in
USB



-


310W

298 x 76 x 228 mm (11,7"x3"x9") 5,16 L/dm³

40dB

3,20 kg / 7,05 lbs.

-

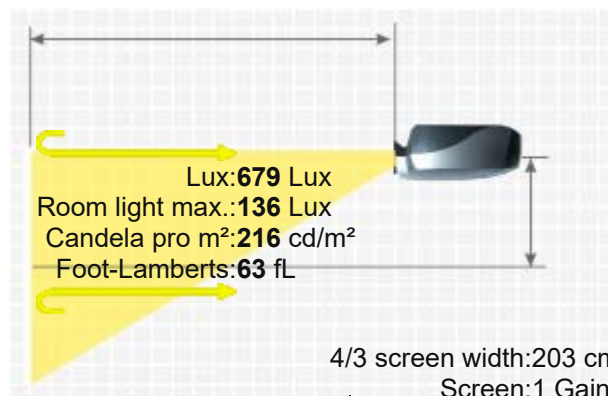

4/3 screen width: 203 cm
Screen: 1 Gain

Weight
Keystone

Illumination	-
Frequenz	H-sync: 25-80 kHz V-sync: 56-120 Hz
Foot-Lamberts	63 fL / max. 399 cm screen width 216 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/sindoricohsrp2100xg-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.