
Solaris Pro



Display Type	 CRT SXGA 5/4		
Ansi-Lumen	Projector 240	Screen	75 Lux (bei 200 cm Screen)
Contrast	-		-
Black Level	-		-
Offset	-		
Resolution	SXGA 1280 x 1024 1.310.720 Pixel		
Video Modes	PAL, SECAM, NTSC		
Application	CRT Projection | Very narrow picture width and rooms with very little light.		
Light Source	-		
Light Life	-		
Operating Costs	-		
Focus	Manual		
Zoom	No Zoom		
Objective	-		
Throw Ratio	-		
Audio	-		
Connections	5 x BNC RGBHV in S-Video in BNC Video in		
Ceiling Mounting	Yes		
Power	-		
Size WxHxD	325 x 321 x 610 mm (12,8"x12,6"x24") 63,64 L/dm³		
Operating Noise	-		

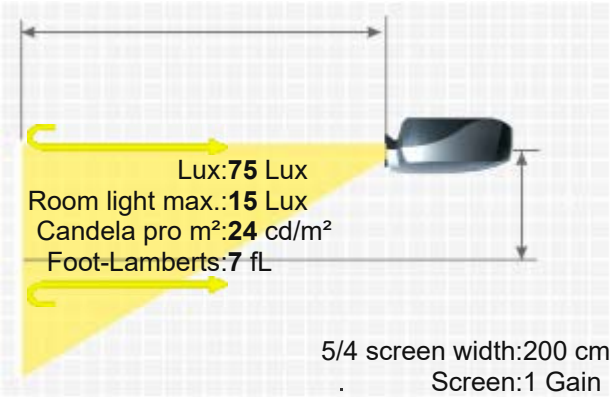

Weight	63,00 kg / 138,89 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	7 fL / max. 131 cm screen width 24 cd/m²
Features	-
In Test	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/solarispro-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

SOLARIS PRO