SONY

make.believe

Solid Installation Projector
VPL-FH36

WUXGA/5,200lm

Key Features

- 5,200 lumens (ISO 21118)
- Native WUXGA (1,920 x 1,200) resolution
- BrightEra® Technology with Long Lasting Optics™
- Flexible 1.6x manual zoom standard lens
- Vertical +60%, Horizontal +/-32% lens shift
- Advanced geometric correction
- Edge blending
- Picture by picture function
- Network control and monitoring
- DICOM GSDF simulation gamma mode
- Synchronized lamp and filter maintenance cycle
- Rich interface terminals including DVI-D and HDMI®
- Blend-in design (available in white or black color)

Dimensions (Front)

Unit: mm (inches)

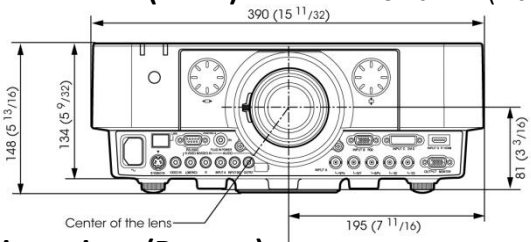

Dimensions (Bottom)

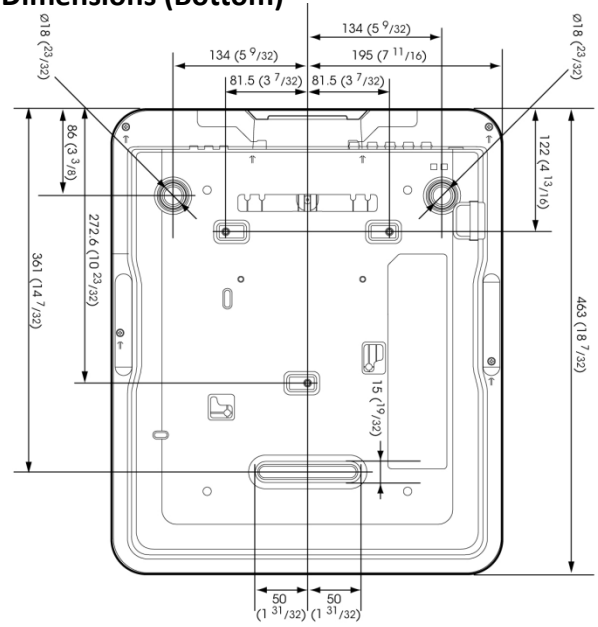

Optional Lenses

	VPLL-Z1024	VPLL-Z1032
Throw Ratio	2.34 to 3.19	3.18 to 4.84
Aperture	f/2.00 to 2.30	f/2.00 to 2.40
Lens Shift	Vertical : +60%/-0% Horizontal : +/- 32%	
Mass	Approx. 1.1kg / 2 lbs. 7oz.	
Lens Adapter	PK-F30LA1	

Optical		
Light Output / Color Light Output		5200 lumens (high mode) 3900 lumens (Std lamp mode)
LCD Panels		0.76" x 3 BrightEra LCD Panel
Panel Display Resolution		WUXGA (1920 x 1200 dots)
Contrast Ratio		2,000:1 (Full white/full black)*1
Light source		High-pressure mercury lamp 330 W type
Lamp replacement time*2		2500H(High) / 3500H(Standard)
Filter cleaning cycle*2		Max. 15000H Same time as the lamp replacement is recommended
Projection Lens	Zoom / Focus	Approx. 1.6x manual zoom / Manual focus
	Lens Shift	Manual, Vertical +60%/-0% Horizontal +/- 32%
	Throw Ratio	1.39:1 to 2.23:1
Screen Size		40" to 600"
Interface		
Computer and Video Input/Output	INPUT A	5BNC (RGB / Y Pb Pr) Audio : Stereo mini jack
	INPUT B	Mini D-sub 15-pin (RGB) Audio : Stereo mini jack (shared with INPUT C)
	INPUT C	DVI-D (HDCP support) Audio : Stereo mini jack (shared with INPUT B)
	INPUT D	HDMI (Digital RGB/Y Pb Pr, Digital Audio) (HDCP support)
	S VIDEO IN	Mini DIN-4pin Audio : Pin jack x2 (shared with VIDEO IN)
	VIDEO IN	Pin Jack Audio : Pin jack x2 (shared with S VIDEO IN)
	Monitor OUT	Mini D-sub 15-pin (from INPUT A and B)
	Audio OUT	Stereo mini jack (variable out)*3
Control Signal Input/Output	RS-232C	D-sub 9 pin
	LAN	RJ-45, 10BASE-T/100BASE-TX
	Control S	Stereo mini jack, Plug in power DC5V
General		
Scanning Frequency		H: 15 to 92kHz, V: 48 to 92Hz
Display Resolution	Computer signal input	Maximum display resolution : 1920x1200 dots
	Video signal input	NTSC, PAL, SECAM, 480/60i, 576/50i, 480/60p, 576/50p, 720/60p, 720/50p, 1080/60i, 1080/50i, 1080/60p, 1080/50p, 1080/24p
Color System		NTSC3.58, PAL, SECAM, NTSC4.43, PAL-M, PAL-N, PAL60
Power Requirements		AC 100V to 240V, 4.6A to 1.9A, 50Hz/60Hz
Power Consumption		460W (AC 100V-120V) 440W (AC 220V-240V)
Standby Mode Power Consumption		9.2 W (Std) / 0.15 W (Low) (AC 100V-120V) 10.4 W (Std) / 0.3W (Low) (AC 220V-240V)
Dimensions (W x H x D)		390 x 148 x 477 mm 15 11/32 x 5 13/16 x 18 25/32"
Mass		8.3kg / 18 lb 5 oz
Optional Accessories		
Replacement Lamp		LMP-F331
Projection Lens Adapter		PK-F30LA1
Replacement Filter		4-172-386-01 (Top) / 4-172-387-01 (Bottom) (filters are cleanable)
Replacement Remote		1-489-092-11 (RM-PJ19)

Connector Panels



*1 The value is average.

*2 The figures are expected maintenance time and not guaranteed.
They will depend on the environment or how the projector is used.

*3 Works as an audio switcher function. Output from a selected channel, not available in standby.

For more information, visit: www.sony.com/projectors

© 2012 Sony Corporation. All rights reserved. Reproduction in whole or in part without written permission is prohibited. Features and specifications are subject to change without notice. Sony, BrightEra, Bright Era Technology with Long Lasting Optics, and the Sony make.believe logo are trademarks of Sony. The HDMI logo and HDMI High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. All other trademarks are the trademarks of their respective.