

Suant HDSS 1600



S U A N T H D S S 1 6 0 0



Brief Introduction

Beta 2.5

Display Type



1 x LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen Contrast Black Level Offset

Projector 1600
600:1 full on/off
2,6667 min. Lumen

Screen 533 Lux (bei 200 cm Screen)
600:1 full on/off
0,893 min. Lumen

Resolution

SVGA 800 x 600
480.000 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC,
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source Light Life

-
6000 h.

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

f=170mm

Throw Ratio

-

Audio

-

Connections

D-sun 15 pin in
YUV in
S-Video in
Cinch Video in
USB reader x1
Card reader x1

Ceiling Mounting Power

-
220W

Size WxHxD

250,8 x 102,8 x 316 mm (9,9"x4"x12,4") 8,06 L/dm³

Operating Noise

35 / 29 dB in Eco Mode

Weight

5,70 kg / 12,57 lbs.

Keystone

-

Illumination


-

Frequenz

-

Foot-Lamberts

50 fL / max. 348 cm screen width

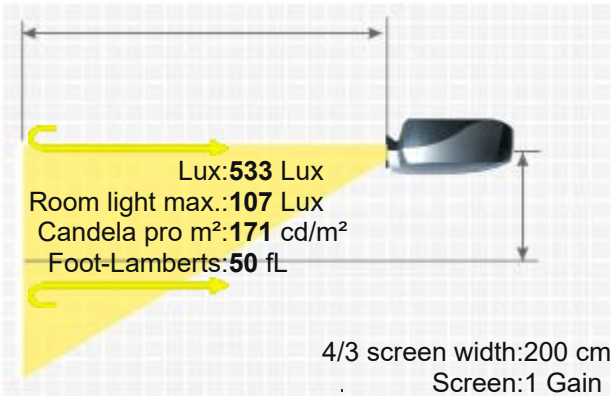

171 cd/m²

Features

- Eco Mode
- TV tuner PAL

Status Data

2009 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/suanthdss1600-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.