SVIC L350




3LCD LED

Brief Introduction
Beta 2.5

A brief introduction to the L350: The SVIC standard portable LCD projector offers 108 Ansi lumens, a contrast of 800:1 and a VGA 640 x 480 resolution. As SVIC specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. Due to the brightness of 108 Ansi lumens, a picture width of 91 cm is possible. In room light, the picture should be max. 61 cm wide. It came onto the market in 2008 and is no longer offered by the manufacturer SVIC.

Display Type	1 x 3,5" LCD TFT Panel VGA 4/3 Liquid Crystal Display		
Ansi-Lumen	Projector: 108 1800 Lumen	Screen: 36 Lux (bei 200 cm Screen)	
Contrast	Projector: 800:1 full on/off	Screen: 800:1 full on/off	
Black Level	Projector: 0,1350 min. Lumen	Screen: 0,045 min. Lumen	
Offset	-		
Resolution	VGA 640 x 480 307.200 Pixel XGA 1024 x 768 compressed		
Video Modes	PAL, SECAM, NTSC		
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Very narrow picture width and rooms with very little light.		
Light Source	LED		
Light Life	-		
Operating Costs	0,00 € LED		
Focus	-		
Zoom	-		
Objective	-		
Throw Ratio	-		
Audio	2 x 2W		
Connections	S-Video in Cinch Video in YUV in		
Ceiling Mounting	-		
Power	-		
Size WxHxD	-		
Operating Noise	-		
Weight	-		
Keystone	-		
Illumination	-		
Frequenz	-		
Foot-Lamberts	3 fL / max. 91 cm screen width 10 cd/m²		
Features	■ IPod docking station.		

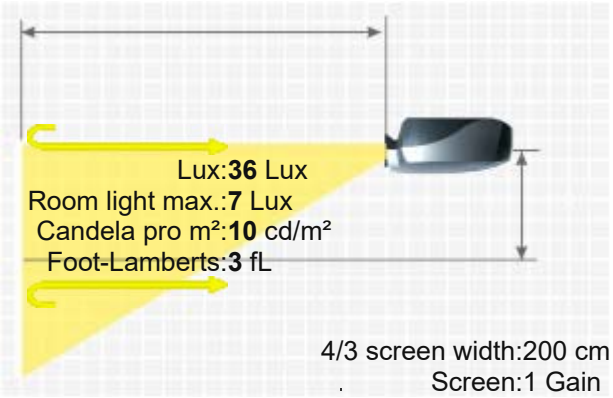

Status 2008 Discontinued (EOL) // Last update of the data: 2024-06-04
Data

More Details



HCinema
https://www.projector-database.com/pro/svicl350-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.