
SVIC S610

< 30 dB
Leise



SVIC S610

Brief Introduction Beta 2.5	With the S610, manufacturer SVIC offers an LCD projector with WVGA 800 x 480 resolution and a contrast of 500:1. The service life of the lamp is up to 6000 hours, which is over 8.2 years with a daily viewing time of 2 hours. As SVIC specifies the brightness of the projector in lumens, we have calculated an approximate ansi-lumen value in this case. An image width of up to 111 cm is possible, as the projector has 120 Ansi lumens. However, if room light is available, the picture should be max. 74 cm wide. With only 28 decibels of operating noise, the model is very quiet compared to others. The model is no longer offered by SVIC.
Display Type	LCD TFT Panel WVGA 16/9 Liquid Crystal Display
Ansi-Lumen	Projector: 120 2000 Lumen — Screen: 53 Lux (bei 200 cm Screen)
Contrast	Projector: 500:1 full on/off — Screen: 500:1 full on/off
Black Level	Projector: 0,2400 min. Lumen — Screen: 0,106 min. Lumen
Offset	-
Resolution	WVGA 800 x 480 384.000 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Very narrow picture width and rooms with very little light.
Light Source	-
Light Life	6000 h.
Operating Costs	-
Focus	-
Zoom	-
Objective	-
Throw Ratio	-
Audio	2 x 2W
Connections	D-sub 15 pin in YUV in S-Video in Cinch Video in Antenne in
Ceiling Mounting	-
Power	-
Size WxHxD	-
Operating Noise	28dB

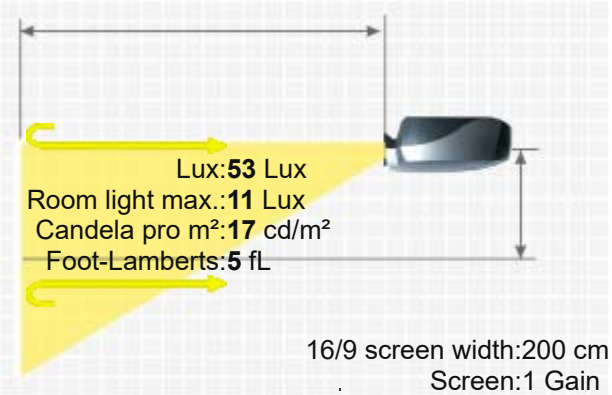

Weight	-
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	5 fL / max. 111 cm screen width 17 cd/m²
Features	■ Password protection ■ NTSC M/N, PAL-M/N(optional), support Standard/HRC/IRC(125 channels, FS Tuner)
Status	- Discontinued (EOL) // Last update of the data: 2024-06-04
Data	
More Details	https://www.projector-database.com/pro/svics610-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.