
TAW HD800



Display Type	 8 Zoll EMF CRT Röhre Luft gekoppelt 4/3 Elektromagnetisch Fokussierte Röhre		
Ansi-Lumen	Projector 205 / 900 Peak	Screen	66 Lux (bei 203 cm Screen)
Contrast	-		-
Black Level	-		-
Offset	-		
Resolution	1800 X 1350		
Video Modes	NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV 480i,480p,525i,525p,720p,1080i)		
Application	CRT Projection | Very narrow picture width and rooms with very little light.		
Light Source	CRT Röhre		
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)		
Operating Costs	-		
Focus	-		
Zoom	No Zoom		
Objective	HD145		
Throw Ratio	-		
Audio	-		
Connections	RGBHV DVI in		
Ceiling Mounting	Yes		
Power	650W		
Size WxHxD	-		
Operating Noise	-		

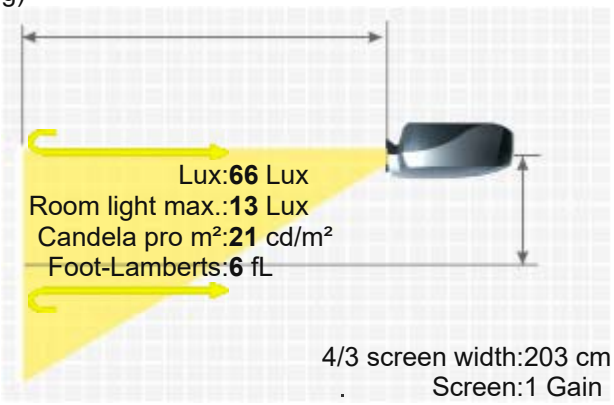

Weight	-
Keystone	-
Illumination	-
Frequenz	H-sync: 15-110 kHz V-sync: 39,5-95 Hz Range max.: 150 MHz
Foot-Lamberts	6 fL / max. 125 cm screen width 21 cd/m²
Features	■ Gamma correction ■ Overscan adjustable
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/tawhd800-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

TAW HD800