
Traveller 738



3LCD Motor

Brief Introduction Beta 2.5	The standard portable 738 LCD projector from Traveller has 1400 Ansi lumens, a contrast of 350:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate a 326 cm image width well. However, if room light is available, the picture width should ideally not exceed 217 cm. It is no longer offered by the manufacturer Traveller.
Display Type	3 x 0,9" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	1400
Projector: Contrast	350:1 full on/off
Projector: Black Level	4,0000 min. Lumen
Projector: Offset	-
Screen	467 Lux (bei 200 cm Screen) 350:1 full on/off 1.346 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC, PAL, SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered
Objective	-
Throw Ratio	-
Audio	2 x 0,5W
Connections	2 x VGA DVI
Ceiling Mounting	-
Power	195W
Size WxHxD	240 x 86 x 305 mm (9,4"x3,4"x12") 6,3 L/dm³
Operating Noise	-
Weight	3,70 kg / 8,16 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	43 fL / max. 326 cm screen width 147 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

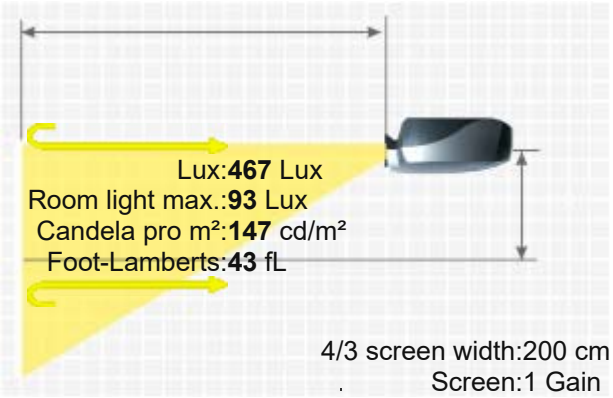

TRAVELLER 738

More Details

HCinema

https://www.projector-database.com/pro/traveller738-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.