

Vidikron Vision Model 140



VIDIKRON VISION MODEL 140



Brief Introduction

Beta 2.5

The stationary Vidikron Vision Model 140 DLP projector has 4000 Ansi lumens, a contrast of 2000:1 and an HDTV 1920 x 1080 resolution. The built-in lens shift function provides freedom when setting up. 4000 Ansi lumens ensure that a picture width of 643 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 429 cm. Even 1080P video signals are no problem for the projector. This model is no longer offered by Vidikron.

Display Type

3 x 0,95" HD2+ DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4000 Screen 1778 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off 2000:1 full on/off

Black Level

2,0000 min. Lumen 0,89 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-22%

Resolution

HDTV 1920 x 1080

Video Modes

2.073.600 Pixel

Application

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Light Source

Wide screen width or rooms with plenty of light (over 200 lumens).


Light Life

1000W Xenon Lamp

Operating Costs

1000 h.

Focus

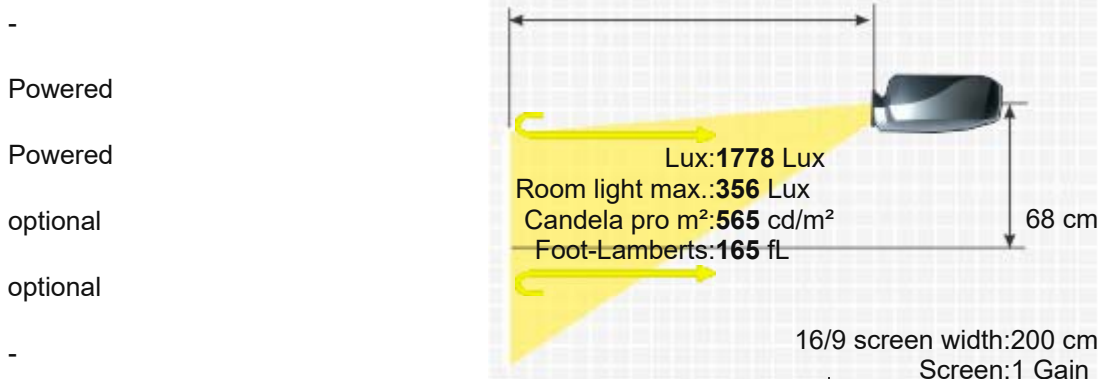

Zoom

Powered

Objective

Powered

Throw Ratio

optional

Audio

optional

Connections

-

Ceiling Mounting

DVI mit HDCP in

Power

RS232C

Size WxHxD

12V Trigger out

Operating Noise

Yes

2100W

731,52 x 342,90 x 657,86 mm (28,8"x13,5"x25,9") 164,25 L/dm³

-

Weight

63,50 kg / 139,99 lbs.

Keystone

-

Illumination

-

Frequenz


H-sync: 15-120 kHz

V-sync: 23,97-160 Hz

Foot-Lamberts

165 fL / max. 643 cm screen width

565 cd/m²

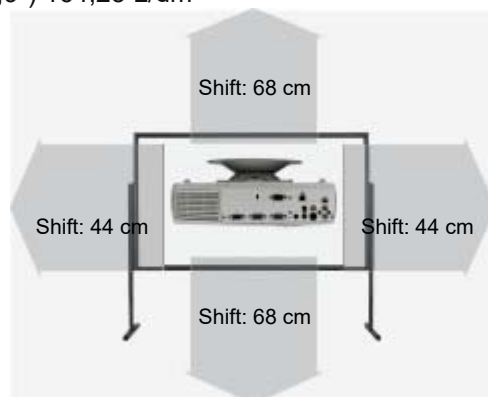

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Gamma correction
- Picture-in-Picture
- Overscan adjustable
- External video processor included.

Features

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
E: Zoom 4.14 – 6.70	4.16-6.59:1	8.3-13.2 m	+/-60%	+/-21%	Powered
D: Zoom 2.60 – 4.11	2.6-4.11:1	5.2-8.2 m	+/-60%	+/-20%	Powered
C: Zoom 1.86 – 2.53	1.86-2.53:1	3.7-5.1 m	+/-60%	+/-22%	Powered
B: Zoom 1.31 – 1.80	1.31-1.8:1	2.6-3.6 m	+/-60%	+/-22%	Powered
Fix Optional Lenses					
A: Fixed 0.67	0.67:1	1.3 m	0.0% Fix		No Zoom

Status Data 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/vidikronvisionmodell140-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.