
Vinew VP-LS2



3LCD

Brief Introduction Beta 2.5	A brief introduction to the VP-LS2: The Vinew standard portable LCD projector offers 3200 Ansi lumens, a contrast of 700:1 and an SVGA 800 x 600 resolution. The projector can illuminate an image width of up to 493 cm with its 3200 Ansi lumens. In room light, however, the image width should ideally be less than 329 cm. The projector is very quiet compared to others with an operating noise of 30 decibels. It is no longer offered by the manufacturer Vinew.
Display Type	3 x 0,7" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	3200
Projector: Contrast	700:1 full on/off
Projector: Black Level	4,5714 min. Lumen
Projector: Offset	-
Screen	1067 Lux (bei 200 cm Screen)
Screen	700:1 full on/off
Screen	1,531 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	180W EHPL Lamp
Light Life	3000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual
Objective	-
Throw Ratio	-
Audio	1 x 2W
Connections	D-sub 15 pin in S-Video in Cinch Video in RS232C
Ceiling Mounting	Yes
Power	250W
Size WxHxD	310 x 96 x 270 mm (12,2"x3,8"x10,6") 8,04 L/dm³
Operating Noise	30dB
Weight	2,70 kg / 5,95 lbs.
Keystone	Vert.: +/-15°
Illumination	95%
Frequenz	-
Foot-Lamberts	99 fL / max. 493 cm screen width 339 cd/m²
Features	-
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

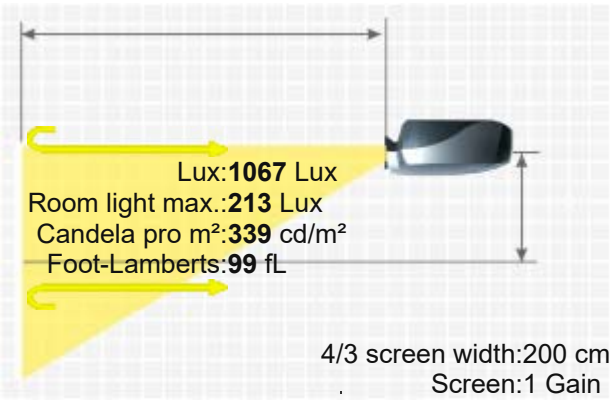

VINEW VP-LS2

Data

More Details



HCinema

https://www.projector-database.com/pro/vinewvpls2-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.