

Vivitek K711UHD

VIVITEK K711UHD



The Vivitek K711UHD 3D Laser DLP fixed-installation projector has 7,000 ANSI lumens, a contrast ratio of 3,000,000:1 and a UHD (4K2K) resolution of 3,840 x 2,160 resolution. Thanks to the laser technology, the projector has a specified lamp life of 20,000 hours, which equates to over 13.7 years if used for four hours a day. It includes lens shift and keystone correction functions, which provide flexibility during installation. An image width of up to 800 cm is possible, as the projector has 7,000 ANSI lumens. In rooms with ambient light, the projector performs best with a narrower image width; we would recommend a maximum of 533 cm. If the image is still too small, the integrated edge-blending software can help to project a larger image using additional projectors. The projector also handles 1080p and 4K video signals with ease. Even ceiling projection is possible thanks to the 360° projection.

Brief Introduction

Beta 2.5

Display Type



1 x 0,65" DLP Chip

HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

7000

Screen 3111 Lux (200 cm Screen width)

Contrast

3000000:1 full on/off

Screen 3000000:1 full on/off

Black Level

0,0021 min. Lumen

Screen 0,001 min. Lumen

Lens shift

Vert.: +15% -5% Hori.: +/-2%

Resolution

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

3D Compatibility

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser

Light Life

20000 h.

Operating Costs

0,00 € Laser

Focus

Manual

Zoom

Manual x1,65

Objective

optional

Throw Ratio

optional

Audio

1 x 10W

Connections


2x HDMI in und 1x out

3D Sync out

D-sub 15pin in und out

Mini Jack Audio in

USB-A (5V/1.5A) in

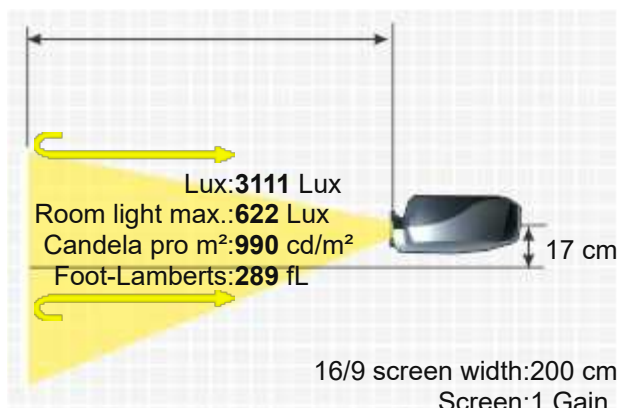

Mini USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT (Optional)




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
565W / 380W Eco
496 x 160 x 380 mm (19,5"x6,3"x15") 30,16 L/dm³
38 / 30 dB in Eco Mode

Weight
Keystone
Illumination

12,00 kg / 26,46 lbs.
Vert.: +/-30°
Hori.: +/-30°
85%

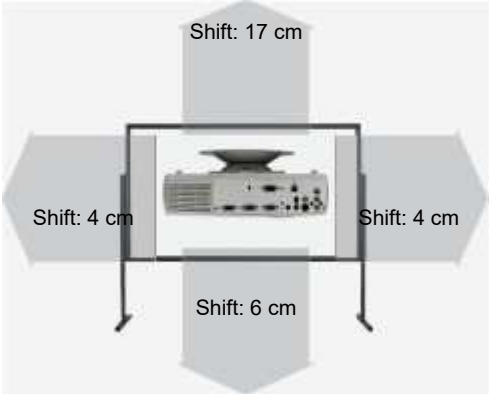

Frequenz
Foot-Lamberts

-
289 fL / max. 800 cm screen width
990 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- PJLink™
- Lan network compatible.
- supports 21:9 aspect ratio
- Projector Control Software (Geometry, Colour, Lens, Picture)

Screen Mirroring

-

Please note

Offset (Full Image Width)
+98 ~ +122 / ST1: +98 ~ +121 / ST2: +98 ~ +122

Optional accessories

	Fernbedienung mit Laserpointer	5041841300	31,39 €
	Deckenhalterung weiß	Halterung45W	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Standart	1.15-1.9:1	230-380 m	15-5%	+/-2%	Manual
ST2	0.8-1.2:1	160-240 m	15-5%	+/-2%	Manual
ST1	0.5:1	100 m	15-5%	+/-2%	No Zoom

Status 2026 Current model // Last update of the data: 2026-09-04

Created: 2026-08-18 09:08:25

Data



More Details



HCinema

<https://www.projector-database.com/pro/vivitekk711uhd-en.html>

