
# Zenith Pro 1200X



| | | | |
|---|---|---|---|
| Display Type |  8" EMF CRT<br>UXGA 4/3 Elektromagnetisch Fokussierte Röhre | | |
| Ansi-Lumen | Projector: 1087 1250 Peak Lumen | Screen: 362 Lux (bei 200 cm Screen) | |
| Contrast | Projector: - | Screen: - | |
| Black Level | Projector: - | Screen: - | |
| Offset | - | | |
| Resolution | UXGA 1600 x 1200<br>1.920.000 Pixel | | |
| Video Modes | PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p | | |
| Application | CRT Projection \| Small screen width, rooms with very little ambient light below 100 lumens. | | |
| Light Source | CRT Röhre | | |
| Light Life | ca. 10000 - 20000 h. (je nach Anwendung) | | |
| Operating Costs | - | | |
| Focus | Manual | | |
| Zoom | No Zoom | | |
| Objective | HD215 | | |
| Throw Ratio | - | | |
| Audio | - | | |
| Connections | S-Video in<br>5 x BNC in<br>1 x Video über BNC in<br>RS232C | | |
| Ceiling Mounting | Yes | | |
| Power | 500W | | |
| Size WxHxD | - | | |
| Operating Noise | - | | |

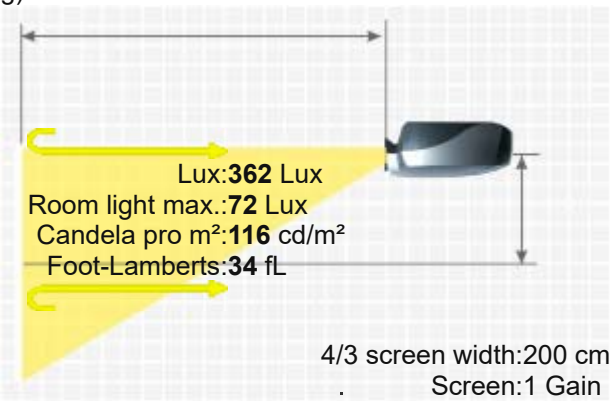


| | |
|---|---|
| Weight | - |
| Keystone | - |
| Illumination | - |
| Frequenz | H-sync: 15-75 kHz<br>V-sync: 37-200 Hz<br>Range max.: 75 MHz |
| Foot-Lamberts | 34 fL / max. 287 cm screen width<br>116 cd/m² |
| Features | ■ Full HD 1080P compatible<br>■ Gamma correction<br>■ Password protection |
| Status | - Discontinued (EOL) // Last update of the data: 2023-08-04 |
| Data | |

More Details

HCinema

https://www.projector-database.com/pro/zenithpro1200x-en.html

ZENITH PRO 1200X

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.