

TAW RunAbout SVGA



Brief Introduction Beta 2.5	A brief introduction to the TAW RunAbout SVGA. The standard portable DLP projector has an SVGA 800 x 600 resolution and a contrast of 1500:1. The projector will be able to illuminate a picture width of 275 cm well. However, if room light is available, the picture width should ideally not exceed 183 cm. The model built in 2004 is no longer offered by TAW.
Display Type	1 x 0,55" DLP SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1000 / Screen: 324 Lux (bei 203 cm Screen)
Contrast	Projector: 1500:1 full on/off / Screen: 1500:1 full on/off
Black Level	Projector: 0,6667 min. Lumen / Screen: 0.216 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W Lamp
Light Life	-
Operating Costs	-
Focus	Manual
Zoom	Manual 1,14
Objective	-
Throw Ratio	1,75-2,0:1
Audio	1 x 1W
Connections	DVI Cinch Video in S-Video in RS232C
Ceiling Mounting	Yes
Power	220W
Size WxHxD	279,4 x 97 x 204,9 mm (11"x3,8"x8,1") 5,52 L/dm³
Operating Noise	33dB
Weight	2,04 kg / 4,5 lbs.
Keystone	Vert.: +/-15°
Illumination	-
Frequenz	H-sync: 15,31-70 kHz V-sync: 43-85 Hz
Foot-Lamberts	30 fL / max. 275 cm screen width 103 cd/m²
Features	-
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

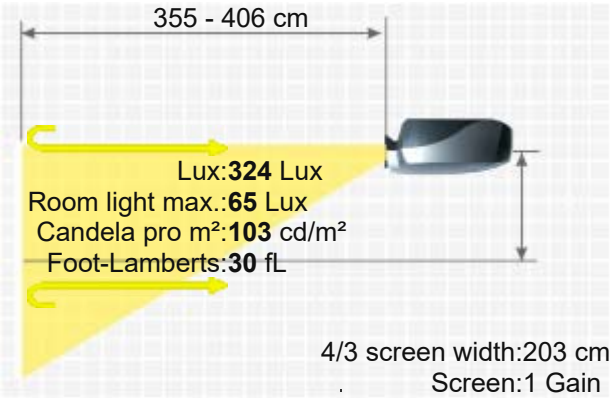

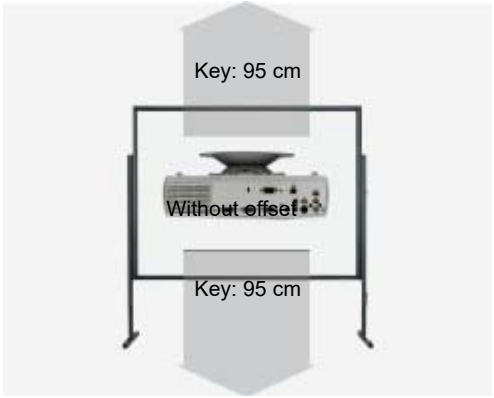

TAW RUNABOUT SVGA

More Details

HCinema

https://www.projector-database.com/pro/tawrunaboutsvga-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.