
H-PEC H 2610N




Brief Introduction Beta 2.5	The standard portable H-PEC H 2610N LCD projector has 2600 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. 2600 Ansi lumens ensure that a picture width of 444 cm is also possible. However, if room light is available, the picture should be max. 296 cm wide. The model built in 2012 is no longer offered by H-PEC.
Display Type	3 x LCD TFT Panel XGA 4/3 Liquid Crystal Display
Projector: Ansi-Lumen	2600
Projector: Contrast	500:1 full on/off
Projector: Black Level	5,2000 min. Lumen
Projector: Offset	-
Screen	867 Lux (bei 200 cm Screen) 500:1 full on/off 1,744 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W Lamp Articel Nr.: H-PEC 2610-LAMP
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,65-1,93 f=18,53-22,18 mm
Throw Ratio	1,45-1,73:1
Audio	1 x 8W
Connections	DVI-I in D-sub 15 pin in und out S-Video in Cinch Video in Cinch Stereo in RS232C Din 9 pin in USB Typ B
Ceiling Mounting	Yes
Power	285W
Size WxHxD	325 x 97 x 260 mm (12,8"x3,8"x10,2") 8,2 L/dm³
Operating Noise	33 dB in Eco Mode

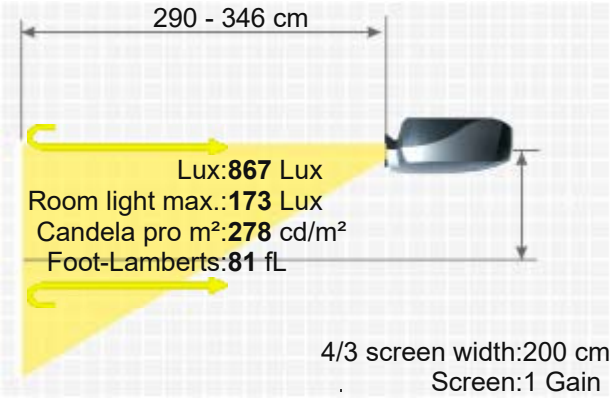

Key: 167 cm

H-PEC H 2610N

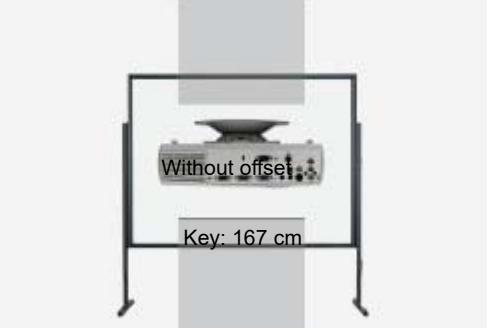

Weight	3,30 kg / 7,28 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 31-92 kHz V-sync: 48-120 Hz
Foot-Lamberts	81 fL / max. 444 cm screen width 278 cd/m²
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Remote control with laser pointer
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details

HCinema

https://www.projector-database.com/pro/HPECH2610N-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.