
Dukane ImagePro 8077




Brief Introduction Beta 2.5	The ImagePro 8077 LCD projector from Dukane has 2000 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. 2000 Ansi lumens ensure that a picture width of 389 cm is also possible. However, if room light is available, the picture should be max. 259 cm wide. It was launched in 2006 and is no longer offered by the manufacturer Dukane.
Display Type	3 x 0,7" LCD TFT Panel mit MLA SVGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 2000 / 1600 im Eco Mode — Screen: 667 Lux (bei 200 cm Screen)
Contrast	Projector: 400:1 full on/off — Screen: 400:1 full on/off
Black Level	Projector: 5,0000 min. Lumen — Screen: 1,68 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W Lamp Articel Nr.: 456-8077
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,17
Objective	F=1,8-2,1
Throw Ratio	1,79-2,14:1
Audio	1 x 1W Mono
Connections	2 x D-sub 15pin in 1 x out S-Video in Cinch Video in USB in RS232C Mini Jack in und out



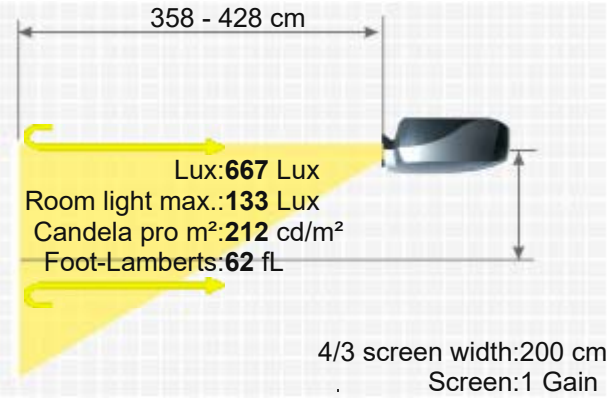

DUKANE IMAGEPRO 8077

Ceiling Mounting	Yes
Power	250 / 232W in Eco Mode
Size WxHxD	304,8 x 101,6 x 266,7 mm (12"x4"x10,5") 8,17 L/dm³
Operating Noise	37 / 33 dB in Eco Mode

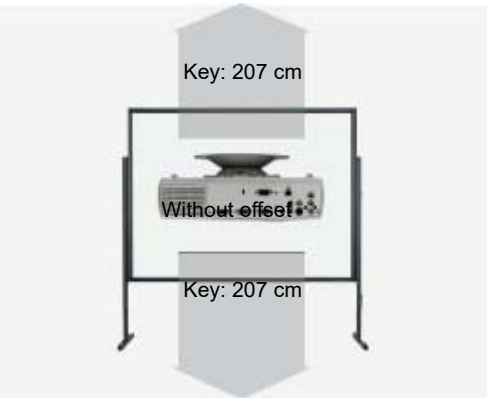

Weight	2,72 kg / 6 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	H-sync: 15-69 kHz V-sync: 43-85 Hz
Foot-Lamberts	62 fL / max. 389 cm screen width 212 cd/m²
Features	■ Freeze ■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/dukaneimagepro8077-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.