
Dukane ImagePro 8767A



Brief Introduction Beta 2.5	A brief introduction to the ImagePro 8767A: The Dukane LCD projector offers 2100 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. An image width of up to 399 cm is possible as the projector has 2100 Ansi lumens. However, if room light is available, the picture should be a maximum of 266 cm wide. The model built in 2004 is no longer offered by Dukane.
Display Type	3 x 0,7" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Ansi-Lumen	Projector: 2100 / 1680 im Eco Mode — Screen: 700 Lux (bei 200 cm Screen)
Contrast	Projector: 400:1 full on/off — Screen: 400:1 full on/off
Black Level	Projector: 5,2500 min. Lumen — Screen: 1,763 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280×1024 compressed
Video Modes	Pal, Pal-M, Pal-N, Pal-60, SECAM, NTSC, HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W / 150W im Eco Mode Lamp Articel Nr.: 456-8767A
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	f=21,6-25,9 mm
Throw Ratio	1,5-1,8:1
Audio	1 x 1W
Connections	D-sub 15pin in und out Cinch Video in Cinch Stereo in S-Video in RS232C Mini Jack in und out
Ceiling Mounting	Yes
Power	260 / 7.5W standby
Size WxHxD	294,6 x 93,9 x 259 mm (11,6"x3,7"x10,2") 7,08 L/dm³
Operating Noise	35 / 30 dB in Eco Mode
Weight	-
Keystone	Vert.: +/-30°
Illumination	-





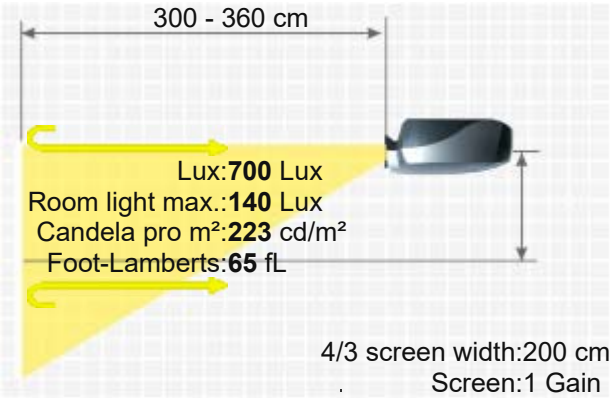

DUKANE IMAGEPRO 8767A

Frequenz	H-sync: 15-100 kHz V-sync: 50-120 Hz
Foot-Lamberts	65 fL / max. 399 cm screen width 223 cd/m²
Features	■ Freeze ■ Eco Mode ■ Kensington Slot ■ Remote control with mouse control ■
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/dukaneimagepro8767a-en.html



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.