
Eiki LC X50






Brief Introduction Beta 2.5	The LC X50 LCD has 3700 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 530 cm is possible as the projector has 3700 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 353 cm is recommended. The model built in 2003 is no longer offered by Eiki.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 3700 / 2950 im Eco Mode — Screen: 1233 Lux (200 cm Screen width)
Contrast	Projector: 1000:1 full on/off — Screen: 1000:1 full on/off
Black Level	Projector: 3,7000 min. Lumen — Screen: 1,237 min. Lumen
Lens shift	Vert.: +50% -0% motorisch
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC, PAL, SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	300W NSH / 240W im Eco Mode Lamp Article Nr.: 610 306 5977
Light Life	2000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,3
Objective	F=1,7-2,0 f=48,2-62,6 mm
Throw Ratio	1,82-2,37:1
Audio	Stereo 3W + 3W RMS
Connections	D-sub 15pin in und out Mini Jack in und out 2 x YUV in 2 x Cinch Stereo in S-Video in Din 8 pin in USB in

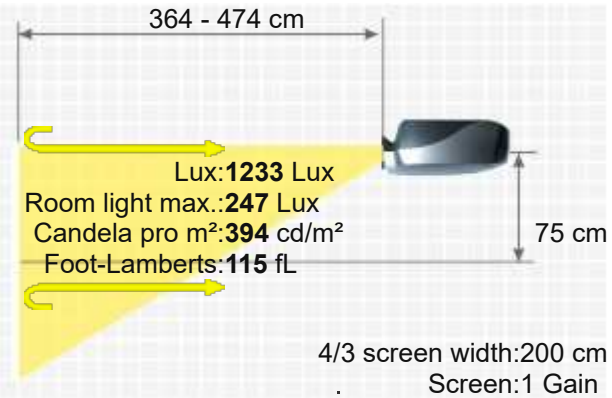

EIKI LC X50



Ceiling Mounting	Yes, is possible.
Power	450W / 350 in Eco Mode
Size WxHxD	450 x 337 x 630 mm (17,7"x13,3"x24,8") 95,54 L/dm³
Operating Noise	39 / 35 dB in Eco Mode

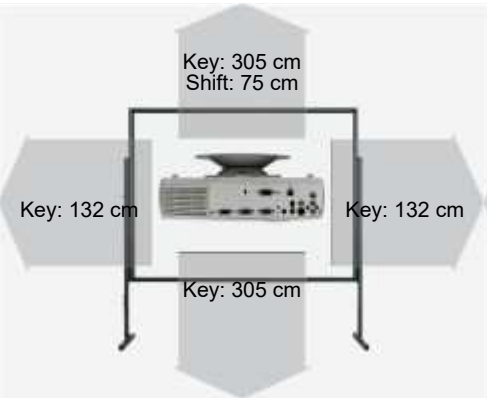

Weight	9,50 kg / 19,84 lbs.
Keystone	Vert.: +/-40° Hori.: +/-20°
Illumination	90%
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 180 MHz
Foot-Lamberts	115 fL / max. 530 cm screen width 394 cd/m²
Features	■ Lens shift Funktion motorisch ■ Freeze ■ Eco Mode ■ Kensington Slot ■ Gamma correction ■ Remote control with laser pointer und mouse control ■
Screen Mirroring	-

Optional accessories

	Nackte Lampe	NLMP3430	111,02 €
	Lampe Ruby	Ruby-LMP3430	134,21 €
	Lampe Original	610-306-5977 / LMP67 / ET-SLMP67	EOL €
	Kompatible Lampe	LMP-K1351	79,83 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	945 060 2239	EOL €
	Luftfilter C links Original	910 292 3187	EOL €
	Luftfilter A unten Original	910 292 3163	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
0001-4279	5.73-8.59:1	1146-1718 m	50%		Manual
0001-4278	4.96-8.3:1	992-1660 m	50%		Manual
0001-4277	2.62-4.77:1	524-954 m	50%		Manual
AH-23132 (T31A)	2.39-4.19:1	478-838 m	50%		Powered
AH-23122 (W31A)	1.29-1.81:1	258-362 m	50%		Powered
AH-32011 (W32)	0.84:1	168 m	0.0% Fix		No Zoom
0001-4296	0.79:1	158 m	0.0% Fix		No Zoom
0001-4275	0.95:1	190 m	0.0% Fix		No Zoom
0001-4276	1.15:1	230 m	0.0% Fix		No Zoom

Status 2003 Discontinued (EOL) // Last update of the data: 2025-12-22

Data  

More Details

HCinema

https://www.projector-database.com/pro/eikilcx50-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.