
Eiki LC XNB5MS




Brief Introduction Beta 2.5	The standard portable LC XNB5MS LCD projector from Eiki has 2500 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. 2500 Ansi lumens ensure that a picture width of 435 cm is also possible. However, if room light is available, the picture should be a maximum of 290 cm wide. The projector is no longer sold by the manufacturer.
Display Type	3 x 0,9" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array

	Projector	Screen
Ansi-Lumen	2500	809 Lux (bei 203 cm Screen)
Contrast	400:1 full on/off	400:1 full on/off
Black Level	6,2500 min. Lumen	2.038 min. Lumen
Offset	-	

Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	NTSC, PAL,SECAM, NTSC4.43, PAL M&N
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200W UHP Lamp Articel Nr.: 610 304 5214
Light Life	1000 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,2
Objective	F=1,9-2,1 f=21,3-25,6 mm
Throw Ratio	1,16-1,4:1
Audio	-
Connections	Computer Eingänge 1x DVI-I (Digital u. Analog), 1x 3,5 mm Klinke /Stereo f. Audio Computer-Ausgänge 1x Dsub 15 (Monitor-out) AV-Eingänge: 3xRCA (Y/Video/Pb/Cb, Pr/Cr), 1x S-Video, 2x RCA (Audio- R, L) AV-Ausgänge: 2 x RCA (Audio-, R, L) Schnittstellen: 1x MiniDIN8 Pin (RS232C), 1x USBTyp B
Ceiling Mounting	Yes
Power	-

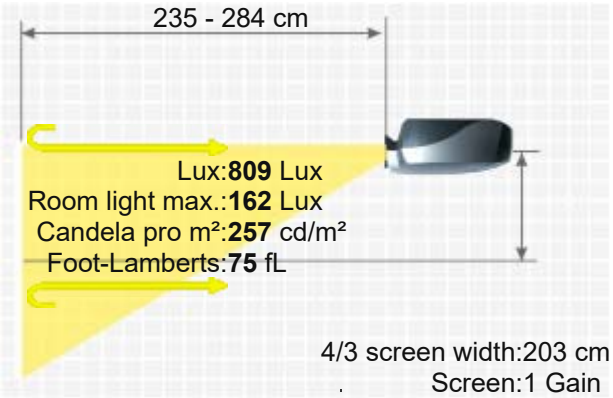

Size WxHxD	333 x 89,5 x 235 mm (13,1"x3,5"x9,3") 6,96 L/dm³
Operating Noise	-
Weight	3,90 kg / 8,6 lbs.
Keystone	Vert.: +/-20° Hori.: +/-10°
Illumination	85%
Frequenz	-
Foot-Lamberts	75 fL / max. 435 cm screen width 257 cd/m²
Features	■ Freeze
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04

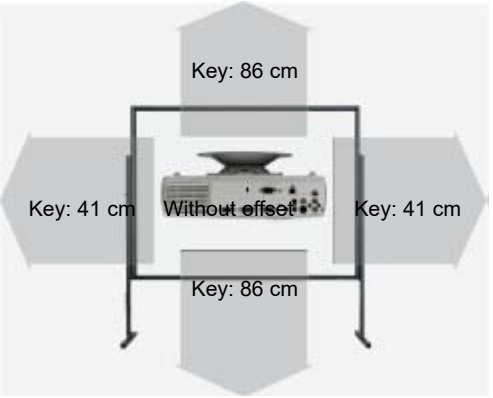

Data



More Details

HCinema

https://www.projector-database.com/pro/eikilcxnb5ms-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.