
Elmo CRP 221



Brief Introduction Beta 2.5	A brief introduction to the Elmo CRP 221. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. The lamp life of the projector is specified as 5000 hours, which equates to over 6.8 years at 2 hours per day. A picture width of up to 408 cm is possible. However, the picture should be smaller in room light. We recommend max. 272 cm. The model built in 2011 is no longer offered by Elmo.
Display Type	3 x 0,55" LCD TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array

	Projector	Screen
Ansi-Lumen	2200	733 Lux (bei 200 cm Screen)
Contrast	500:1 full on/off	500:1 full on/off
Black Level Offset	4,4000 min. Lumen	1,475 min. Lumen

Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	220W UHP Lamp Articel Nr.: 610-349-7518 / LMP142 / ET-SLMP142
Light Life	5000 h. 6000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=2,0-2,15 f=18,38-22,06 mm
Throw Ratio	1,62-1,92:1
Audio	1W Mono

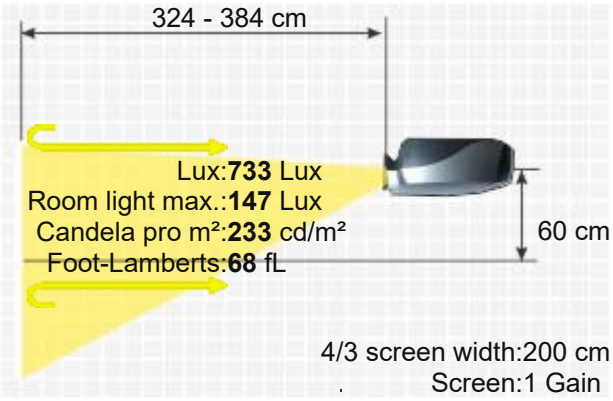

Connections	D-sub 15 pin in S-video in Cinch Video in RS232C Din 9 pin RJ45 in




Ceiling Mounting	Yes
Power	259,2 / 204,3W in Eco Mode
Size WxHxD	333,5 x 94,2 x 247,0 mm (13,1"x3,7"x9,7") 7,73 L/dm³
Operating Noise	34 / 29 dB in Eco Mode



Weight	2,50 kg / 5,51 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	85%

ELMO CRP 221

Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 140 MHz
Foot-Lamberts	68 fL / max. 408 cm screen width
	233 cd/m²
Features	■ Eco Mode ■ Automatic and manual vertical keystone correction ■ Kensington Slot ■ PJLink™ ■ Lan network compatible. ■ Digital Zoom 16x.
Status Data	2011 Discontinued (EOL) // Last update of the data: 2023-08-04
More Details	https://www.projector-database.com/pro/elmocrp221-en.html

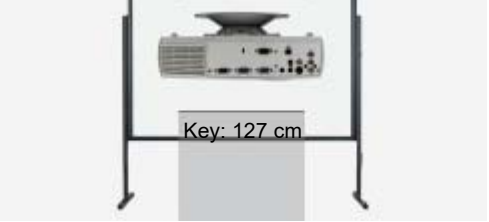

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.