Founder FP400X



3LCD Bild im Bild USB

Brief Introduction Beta 2.5	With the FP400X, manufacturer Founder offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 500:1. The horizontal and vertical keystone correction provides leeway when setting up. An image width of up to 551 cm is possible as the projector has 4000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 367 cm is recommended. It is no longer offered by the manufacturer Founder.
Display Type	3 x 0,99" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 4000 / Screen: 1294 Lux (bei 203 cm Screen)
Contrast	Projector: 500:1 full on/off / Screen: 500:1 full on/off
Black Level	Projector: 8,0000 min. Lumen / Screen: 2.604 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	250W SHP Lamp
Light Life	2000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	f=33,4-43,3 mm
Throw Ratio	1,66-2,16:1
Audio	1 x 1W
Connections	DVI in D-sub 15pin in und out YUV in Cinch Video in Cinch Stereo in S-Video in Mini Jack in und out USB RS232C
Ceiling Mounting	Yes
Power	280W
Size WxHxD	364 x 110 x 285 mm (14,3"x4,3"x11,2") 11,41 L/dm³
Operating Noise	-
Weight	5,30 kg / 11,68 lbs.

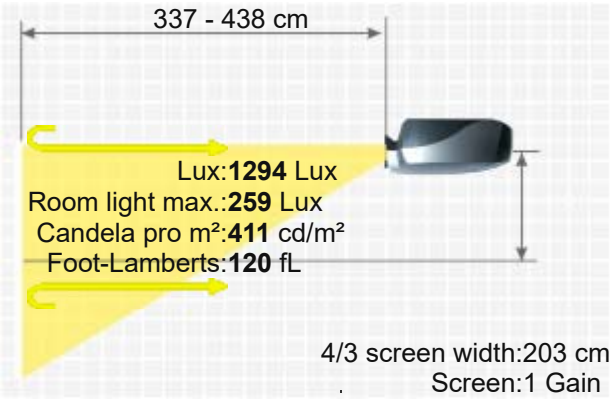



FOUNDER FP400X

Keystone	Vertical und horizontal
Illumination	-
Frequenz	H-sync: 15-107 kHz V-sync: 43-120 Hz
Foot-Lamberts	120 fL / max. 551 cm screen width 411 cd/m²
Features	■ Kensington Slot ■ Picture-in-Picture
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/founderfp400x-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.