
Fujitsu LPF 7600

FUJITSU LPF 7600

Brief Introduction Beta 2.5	With the LPF 7600, manufacturer Fujitsu offers a stationary LCD projector with XGA 1024 x 768 resolution and a contrast of 400:1. An image width of up to 508 cm is possible. However, the image should be smaller in room light. We recommend max. 339 cm. It is no longer offered by the manufacturer Fujitsu.
Display Type	3 x 1,3" psi TFT Panel mit MLA XGA 4/3 Liquid Crystal Display with Micro Lense Array
Projector: Ansi-Lumen	3400
Projector: Contrast	400:1 full on/off
Projector: Black Level	8,5000 min. Lumen
Projector: Offset	-
Screen	1100 Lux (bei 203 cm Screen) 400:1 full on/off 2.771 min. Lumen
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 X 1200 compressed
Video Modes	NTSC, PAL, SECAM, NTSC4.43, MPAL, NPAL
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	250W NSH Lamp
Light Life	1500 h.
Operating Costs	-
Focus	Powered
Zoom	Powered 1,19
Objective	F=1,8-2,15
Throw Ratio	-
Audio	2 x 3W Stereo
Connections	Rca Pin, S-terminal Audio:Stero mini jack x(RGB),RCA(L/R)pin x 1(video) Input 1-Digital RGB:DVI Digital 24 pin x 1 Analog RGB:HD-sub 15pin x 1 Input 2-Analog RGB: HD D-sub 15pin x 1 Input 3-RGB/DVD :BNC(5) X 1 Fernbedienung RS232C: 9Pin D-SUB Maus: Ps2Mini Din 8Pin x 1, USB x 1
Ceiling Mounting	-
Power	380W
Size WxHxD	279 x 150 x 401 mm (11"x5,9"x15,8") 16,78 L/dm³
Operating Noise	-
Weight	7,50 kg / 16,53 lbs.
Keystone	-
Illumination	90%
Frequenz	H-sync: 24-120 kHz V-sync: 50-120 Hz
Foot-Lamberts	102 fL / max. 508 cm screen width 349 cd/m²
Features	Lens shift, resizing, zoom (x4, x 16, x 25)
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

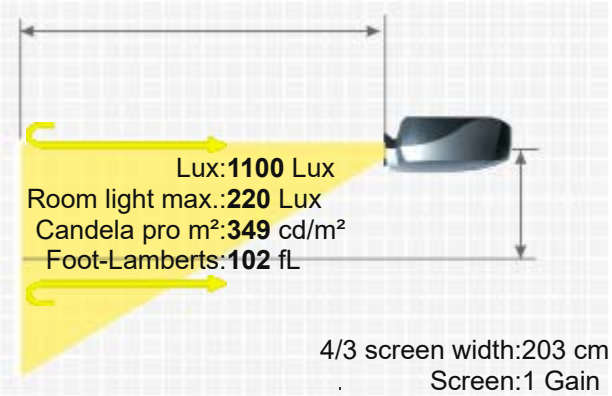

More Details

HCinema

https://www.projector-database.com/pro/fujitsulpf7600-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.