Gygar GT221



3LCD Pointer USB

Brief Introduction Beta 2.5	A brief introduction to the Gygar GT221. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. An image width of up to 408 cm is possible. However, the image should be smaller in room light. We recommend max. 272 cm. It was launched in 2006 and is no longer offered by the manufacturer Gygar.
Display Type	3 x 0,63" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	2200
Contrast	500:1 full on/off
Black Level	4,4000 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	180W NHS Lamp
Light Life	2500 h. 3000 in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,17
Objective	F=1,8-2,1 f=26,5-31,1 mm
Throw Ratio	2,07-2,43:1
Audio	1 x 2W
Connections	Input 2 x RGB 15 pin D-Sub 1 x Composite Video 1 x S-Video 1 x Mini Jack Audio Output 1 x RGB 15 pin D-Sub 1 x USB for Mouse 1 x RS232 1 x Mini Jack Audio
Ceiling Mounting	Yes
Power	-
Size WxHxD	310 x 96 x 270 mm (12,2"x3,8"x10,6") 8,04 L/dm³
Operating Noise	33 / 30 dB in Eco Mode
Weight	2,70 kg / 5,95 lbs.
Keystone	Vert.: +/-30°
Illumination	-

Projector

Lux	733 Lux (bei 200 cm Screen)
Contrast	500:1 full on/off
Black Level	1,475 min. Lumen

Screen

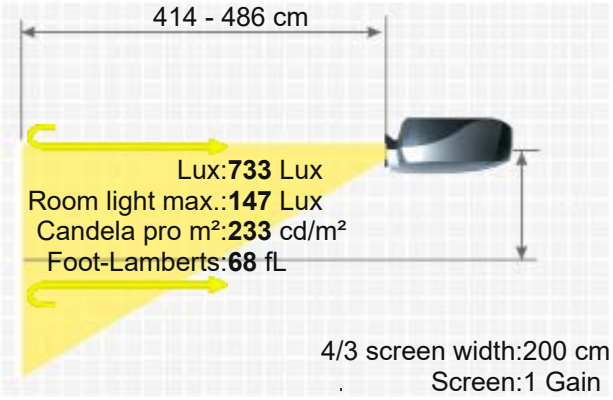



GYGAR GT221

Frequenz	H-sync: 15-100 kHz V-sync: 43-120 Hz
Foot-Lamberts	68 fL / max. 408 cm screen width
	233 cd/m²
Features	■ Eco Mode ■ Remote control with laser pointer
Status	2006 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	



More Details

https://www.projector-database.com/pro/gygargt221-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.