


Optoma TX540

OPTOMA TX540



With the TX540, manufacturer Optoma offers a DLP projector with XGA 1024 x 768 resolution and a contrast of 2500:1. The manufacturer Optoma specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. Thanks to the brightness of 2500 Ansi lumens, a picture width of 435 cm is possible. In room light, the image should be max. 290 cm wide. Furthermore, the projector can play 1080P without any problems. With only 29 decibels of operating noise, the model is very quiet compared to others. On the market since 2009, the model is no longer offered by the manufacturer Optoma.

 1 x 0,55" DC3 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector	2500	833 Lux (bei 200 cm Screen)
	2500:1 full on/off	2500:1 full on/off
Screen	1,0000 min. Lumen	0,334 min. Lumen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

180W P-VIP Lamp

Articel Nr.: BL-FP180E / SP.8EF01GC01

4000 h. 5000 h. in Eco Mode

-

Manual


Manual 1,2

F=2,41-2,66 f=18,2-21,8 mm

1,6-1,92:1

2 x 5W

HDMI
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
RS232C
RJ45
Mini Jack Audio in und out

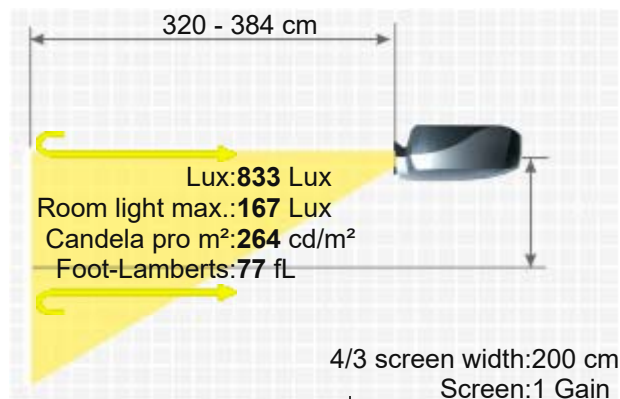

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
232W
324 x 97 x 234 mm (12,8"x3,8"x9,2") 7,35 L/dm³
29 / 27 dB in Eco Mode

Weight
Keystone
Illumination

2,90 kg / 6,39 lbs.
Vert.: +/-40°
-

Frequenz

H-sync: 15-91 kHz
V-sync: 25-85 Hz

Foot-Lamberts

77 fL / max. 435 cm screen width
264 cd/m²

Features


- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Password protection
- Remote control with laser pointer
- Lan network compatible.

Optional

- | | |
|-------------------------|--|
| Bulb only Osram | NLMP19501 |
| Lamp ruby | Ruby-LMP19501 |
| Lamp original | BL-FP180E / SP.8EF01GC01 |
| Compatible lamp | LMP-K19120 |
| Remote control original | BR-5023L / BR-3057L / BR-5029L / BR-5030L / BR-5033L |
| Ceiling Mount 100-120 | Halterung100 |

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19620>
2009 Discontinued (EOL) // Last update of the data: 2023-08-04

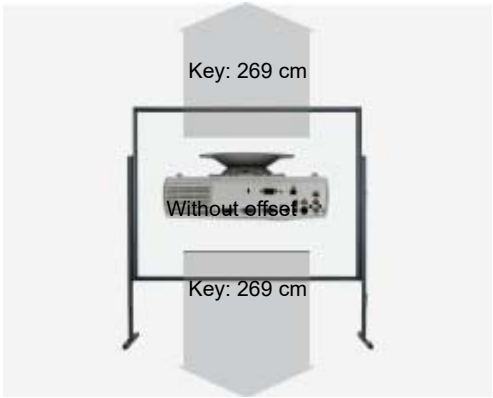

More Details



HCinema

<https://www.projector-database.com/pro/optomatx540-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.