


Panasonic PT DZ870 /E/U/L/S/K

PANASONIC PT DZ870 /E/U/L/S/K



The Panasonic PT DZ870 /E/U/L/S/K stationary 3D DLP projector has 8500 Ansi-Lumen, a contrast of 10000:1 and a WUXGA 1920 x 1200 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 8500 Ansi lumens, a picture width of 937 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 625 cm). In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Playing 1080P and 3D is also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. The projector was launched in 2013 and is no longer sold by the manufacturer, but is still very popular in our projector database.

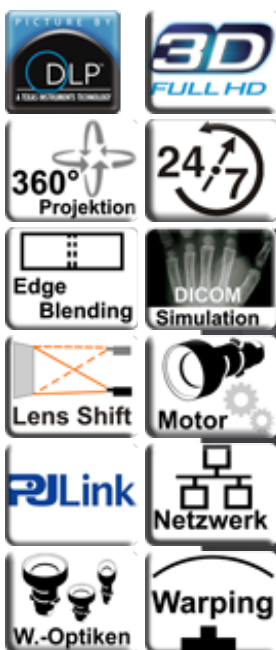

1 x DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Projector

8500

10000:1 full on/off

0,8500 min. Lumen

Vert.: +50% -0% Hori.: +/-10%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 420W UHM Lamp

Article Nr.: ET-LAD120 / ET-LAD120W

2000 h. 3000 h. in Eco Mode

15,71% / 0,55 €

Powered

Powered 1,32

F=1,7-2,0 f=25,6-33,8 mm / L optional


1,7-2,4:1

Screen

3778 Lux (bei 200 cm Screen)


10000:1 full on/off

0,378 min. Lumen

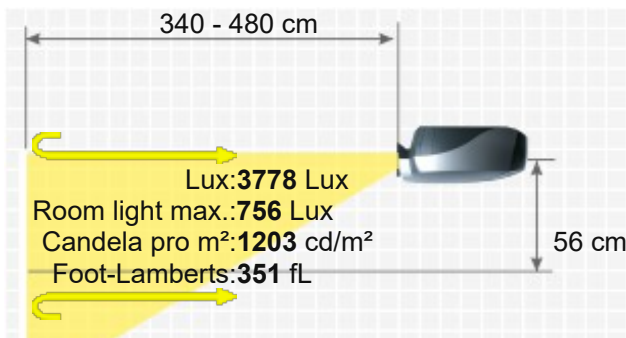

Audio	Nein	16/9 screen width:200 cm Screen:1 Gain
Connections	DVI-D in HDMI in 5 x BNC RGBHV in D-sub 15 pin in BNC Video in S-Video in RS232C Din 9 pin in und out RJ45 in 1 x BNC 3D SYNC IN/OUT SD-SDI / HD-SDI / 3G-SDI	
Ceiling Mounting	Yes, is possible.	
Power	1130W	
Size WxHxD	498 x 200 x 513 mm (19,6"x7,9"x20,2")	51,09 L/dm³
Operating Noise	-	

Weight	20,00 kg / 44,09 lbs.
Keystone	Vert.: +/-40°
Illumination	90%
Frequenz	H-sync: 15-100 kHz V-sync: 24-120 Hz Range max.: 162 MHz
Foot-Lamberts	351 fL / max. 937 cm screen width 1203 cd/m²
Features	- Real Full HD 3D - Full HD 1080P compatible - Direkt Power Off - Lens shift Funktion - Eco Mode - Gamma correction - Dynamic iris - Warping 360° installable 24/7 continuous operation capable - Edge Blending - PJLink™ - Control via web browser - Lan network compatible.
Screen Mirroring	-

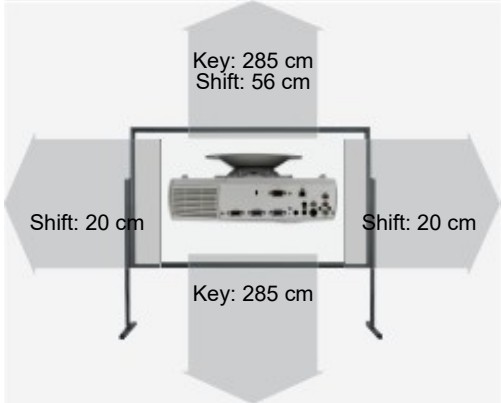

Optional accessories

	Doppel Lampe Ruby	Ruby-LMP22069	467,24 €
	Einzel Lampe Ruby	Ruby-LMP22068	259,52 €
	Portrait Doppel Lampe inkl. Luftfilter Original	ET-LAD120PW	862,57 €
	Portrait Einzel Lampe inkl. Luftfilter Original	ET-LAD120P	499,74 €
	Doppel Lampe inkl. Luftfilter Original	ET-LAD120W	673,40 €
	Einzel Lampe Original	ET-LAD120	548,91 €
	Doppel Kompatible Lampe	LMP-K22064	224,21 €
	Einzel Kompatible Lampe	LMP-K22063	126,93 €
	Objektiv Original	ET-DLE150	3.481,37 €
	Objektiv Original	ET-DLE060	4.005,06 €

	Objektiv Original	ET-DLE105	5.215,56 €
	Objektiv Original	ET-DLE1STD / TKGF0156	416,20 €
	Rental frame Original	ET-RFD91	EOL €
	Deckenhalterung Original	ET-PKD130B	EOL €
	Deckenhalterung Original	ET-PKD120S	EOL €
	Deckenhalterung Original	ET-PKD120H	EOL €
	Objektiv Gebraucht Original	ET-DLE250	1.898,73 €
	Objektiv Gebraucht Original	ET-DLE150Z	1.839,23 €
	Objektiv Gebraucht Original	ET-DLE450	1.482,23 €
	Objektiv Gebraucht Original	ET-DLE350	3.481,37 €
	Objektiv Original	ET-DLE055	4.151,99 €
	Objektiv Gebraucht Original	ET-DLE085	2.811,38 €
	Objektiv Original	ET-DLE080	3.373,65 €
	Fernbedienung Original	N2QAYA000060	30,40 €
	Filter Original	TMZX5209	EOL €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-DLE450	5.4-8.6:1	10.8-17.2 m	50%	+/-10%	Powered
ET-DLE350	3.6-5.4:1	7.2-10.8 m	50%	+/-10%	Powered
ET-DLE250	2.3-3.6:1	4.6-7.2 m	50%	+/-10%	Powered
ET-DLE1STD / TKGF0156	1.7-2.4:1	3.4-4.8 m	50%	+/-10%	Powered
ET-DLE150	1.3-1.9:1	2.6-3.8 m	50-16%	30-10%	Powered
ET-DLE105	1-1.3:1	2-2.6 m	50%	+/-10%	Powered
ET-DLE085	0.8-1:1	1.6-2 m	50-16%	30-10%	Powered
ET-DLE080	0.8-1:1	1.6-2 m	50%	+/-10%	Powered
ET-DLE060	0.6-0.8:1	1.2-1.6 m	0.00% Fix		Powered
Fix Optional Lenses					
EZ-DLE030	0.38:1	0.8 m	0.00% Fix		No Zoom
ET-DLE055	0.8:1	1.6 m	0.0% Fix		No Zoom
Status	2013 Discontinued (EOL) // Last update of the data: 2025-03-03				
Data	Created: 2013-01-31 09:20:56				





HCinema

<https://www.projector-database.com/pro/panasonicptdz870-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.