
Plus U2 870



Brief Introduction Beta 2.5	The Plus U2 870 standard portable DLP projector has 700 Ansi lumens, a contrast of 500:1 (full on/off) 250:1 (ANSI) and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 230 cm well. However, if room light is available, the picture width should ideally not exceed 153 cm. This model is no longer offered by Plus.
Display Type	1 Chip DLP 0,67" SVGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 700 / Screen: 226 Lux (bei 203 cm Screen)
Contrast	Projector: 500:1 (Full on/off) 250:1 (ANSI) / Screen: 500:1 (Full on/off) 250:1 (ANSI)
Black Level	Projector: 1,4000 min. Lumen / Screen: 0.455 min. Lumen
Offset	-
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	NTSC, PAL, SECAM
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	120W p-VIP Lamp Articel Nr.: 28-650 / PU21080L
Light Life	1000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,18
Objective	F=3,0-3,3 f=28-33 mm
Throw Ratio	2,06-2,42:1
Audio	1W Mono
Connections	HD D-sub 15pin x 1 Stereo Mini Jack x 1 Composite Video: RCA x 1 S-Video: DIN x 1 Audio (video): RCA x 2 (L,R)
Ceiling Mounting	Yes
Power	180W
Size WxHxD	235 x 58 x 297 mm (9,3"x2,3"x11,7") 4,05 L/dm³
Operating Noise	-
Weight	2,50 kg / 5,51 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	21 fL / max. 230 cm screen width 72 cd/m²

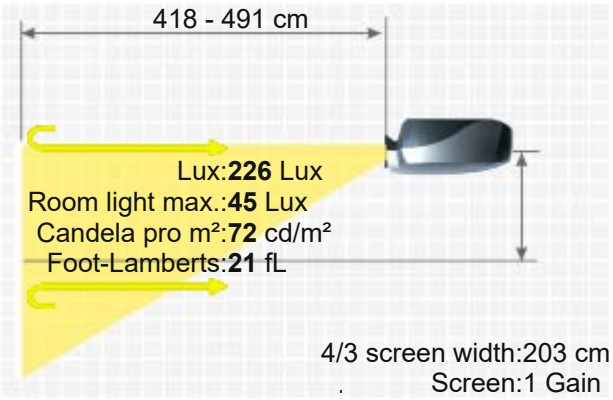

Features	Remote control with laser pointer und mouse control
In Test	-

Optional		
	Bulb only Osram	NLMP2947
	Lamp original	28-650 / PU21080L
	Universal Remote original	Fernb-uni-V3

Order here: https://www.hcinema.de/lampen/shop-en.php?id=n2950

Status Data: 1999 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details: https://www.projector-database.com/pro/plusu2870-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.