Xerox DP 1015



DLP | Pointer | USB

Brief Introduction Beta 2.5	A brief introduction to the DP 1015: The Xerox DLP projector offers 1500 Ansi lumens, a contrast of 900:1 and an XGA 1024 x 768 resolution. An image width of up to 337 cm is possible as the projector has 1500 Ansi lumens. However, if room light is available, the picture should be a maximum of 225 cm wide. On the market since 2004, the model is no longer offered by the manufacturer Xerox.
Display Type	1 x 0,7" DLP Chip XGA 4/3 Ti Digital Light Processing Chip
Ansi-Lumen	Projector: 1500
Contrast	Projector: 900:1 full on/off
Black Level	Projector: 1,6667 min. Lumen
Offset	
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	150W VIP Lamp Articel Nr.: LMP15985
Light Life	1500 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	-
Throw Ratio	-
Audio	1 x 1W
Connections	M1-DA (DVI) D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C
Ceiling Mounting	Yes
Power	220W
Size WxHxD	229 x 69 x 193 mm (9"x2,7"x7,6") 3,05 L/dm³
Operating Noise	43dB
Weight	-
Keystone	Vert.: +/-20°
Illumination	-

Screen: 500 Lux (bei 200 cm Screen)
Screen: 900:1 full on/off
Screen: 0,557 min. Lumen

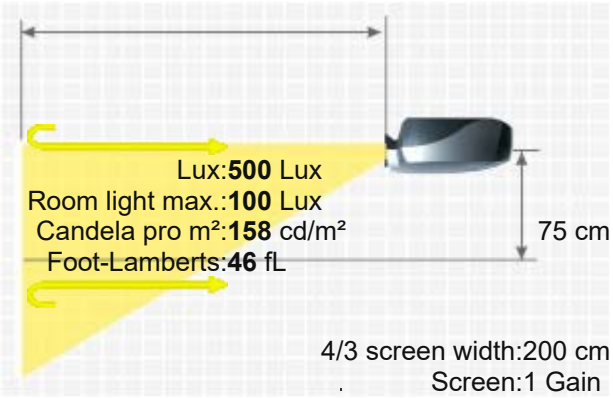

XEROX DP 1015

Frequenz	H-sync: 15-70 kHz V-sync: 45-85 Hz Range max.: 230 MHz
Foot-Lamberts	46 fL / max. 337 cm screen width
	158 cd/m²
Features	■ Freeze ■ Remote control with laser pointer ■
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	
More Details	https://www.projector-database.com/pro/xeroxdp1015-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.